




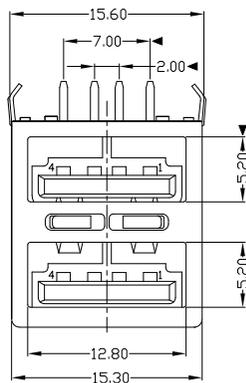
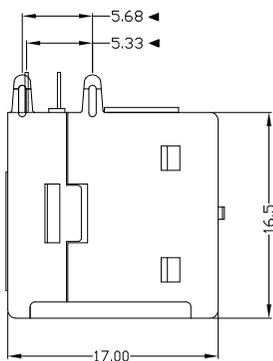





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



- NOTES:
1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-08*N-1*R60

1: Au 1U*
6: Au 30U*
W: WHITE
B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5	CLIP	STAINLESS STEEL	1	
4	BACK COVER	SPCC	1	PLATED NICKEL
3	HOUSING	PBT	1	UL94V-0
2	SHELL	SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN

X	X.* ±2'	UNITS
.X ±0.35	.X.* ±2'	mm
.X	.X.* ±1'	MAT'L
.XX ±0.3	.X.* ±1'	SEE NOTE
.XX	.XX.*	FINISH
.XX ±0.25	.XX.*	SEE NOTE
.XXX	.XXX.*	Q'TY
.XXX ±0.15	.XXX.*	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

东莞市铀高电子制品有限公司			
TITLE: USB AF 90° DIP 双层全包 双外弹		PART NO.: USAF-08*N-1*R60	
DR: Ricky 2014/04/15		DWG NO.: AII-R60	
CHKD: Ricky 2014/04/15		SCALE: 1:1	SHEET: 1/1
APPD:		REV.: B	CUSTOMER DRAWING