

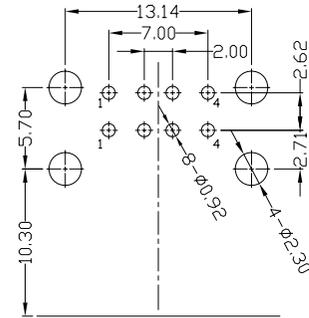






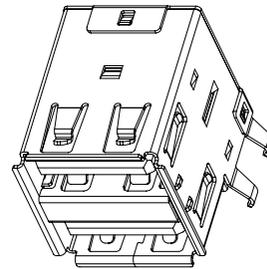


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

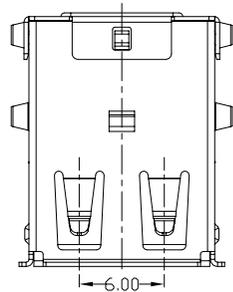

RECOMMENDED PCB LAYOUT

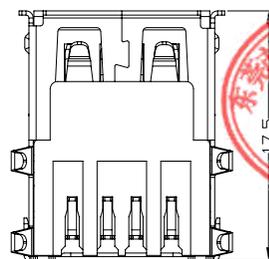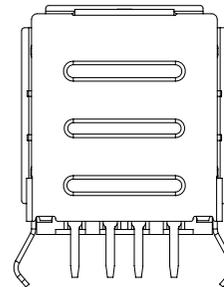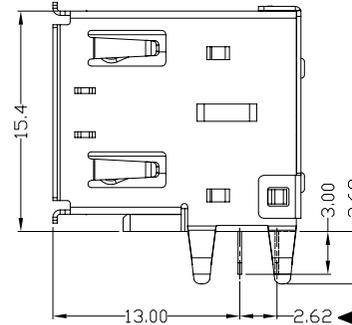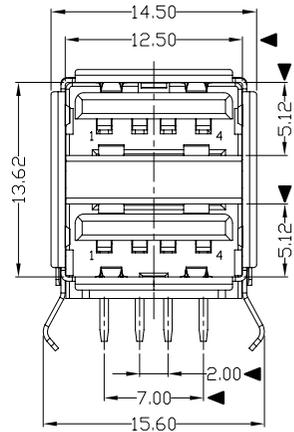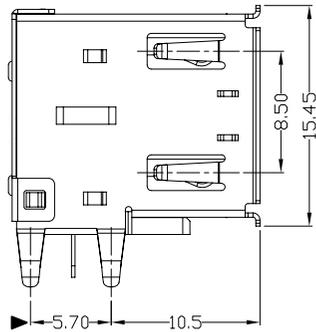

NOTES:



- 1) ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
 2) INSULATION RESISTANCE: 1000MΩ MIN;
 3) CONTACT RESISTANCE: 30mΩ MAX;
 4) WITHSTANDING VOLTAGE: 500V AC;
 5) OPERATING TEMPERATURE:-55°C TO +85°C.
 2) Mechanical:
 1) Mating Force: 35N MAX
 2) Unmating Force: 10N MIN.
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-08*N-1*R61

- 1:Au 1U"
 6:Au 30U"
 W:WHITE
 B:BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.* ±2'	UNITS
5	CLIP	COPPER ALLOY	1	PLATED NICKEL	X. ±0.35	X.* ±2'	mm
4	BACK COVER	SPCC	1	PLATED NICKEL	.X ±0.3	.X.* ±1'	MAT'L
3	HOUSING	PBT	1	UL94V-0	.XX ±0.25	.XX.*	SEE NOTE
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX.*	SEE NOTE
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.		
NO	PARTS	MATERIAL	QTY	FINISHING			

东莞市铀高电子制品有限公司

TITLE:	PART NO.:
USB A母双层90° 半包成品(无弹)	USAF-08*N-1*R61
DR: gan 2012/6/30	DWG NO.:
CHKD: gan 2012/6/30	AII-R61
APPD:	SCALE SHEET REV. CUSTOMER DRAWING
	1:1 1/1 B