


REV.	ECN. NO.	APPD.

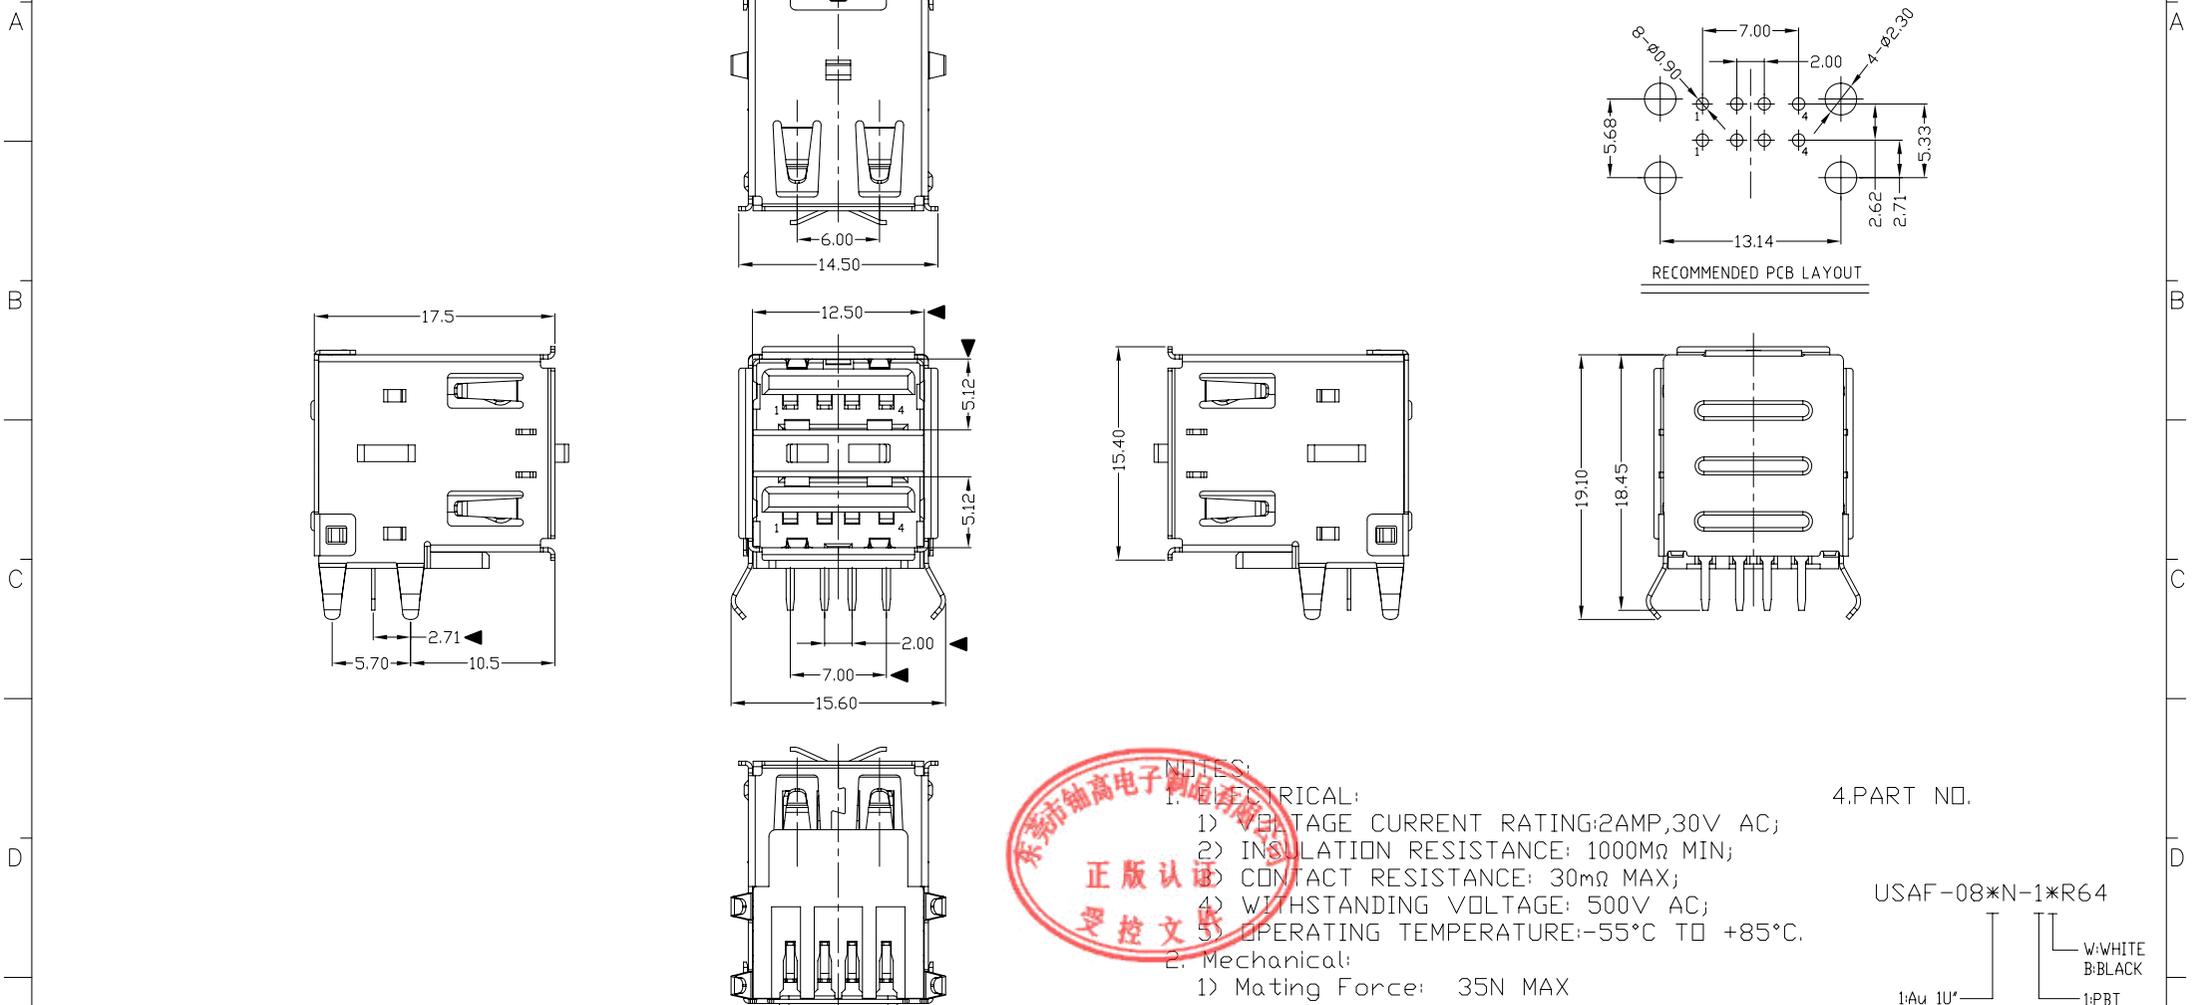

- NOTES:
1. ELECTRICAL:
 - 1) RATING CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000M Ω MIN;
 - 3) CONTACT RESISTANCE: 30m Ω MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.


4. PART NO. USAF-08*N-1*R64

1: Au 1U*
 6: Au 30U*

W: WHITE
 B: BLACK
 1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5	CLIP	COPPER ALLOY	1	PLATED NICKEL
4	BACK COVER	SPCC	1	PLATED NICKEL
3	HOUSING	PBT	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN

X. ± 0.35	X.' $\pm 2^*$	UNITS	mm	东莞市铀高电子制品有限公司
.X ± 0.3	.X' $\pm 1^*$	MAT'L	SEE NOTE	
.XX ± 0.25	.XX'	FINISH	SEE NOTE	
.XXX ± 0.15	.XXX'	Q'TY	SEE NOTE	
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC</small>				TITLE: USB AF 90° DIP 双层半包 双层弹 PART NO.: USAF-08*N-1*R64 DR: gan 2012/6/30 DWG NO.: AII-R64 CHKD: gan 2012/6/30 APPD:
				SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING