

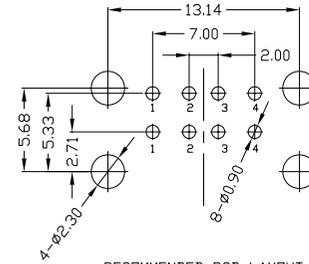
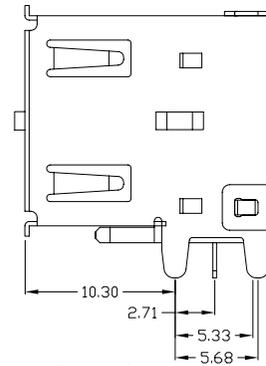
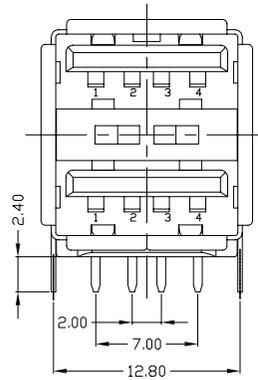


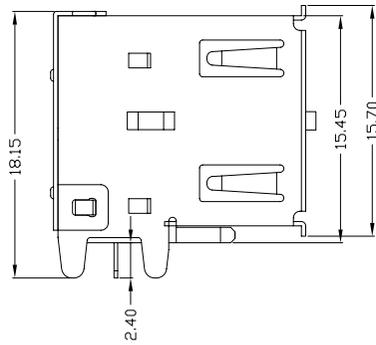

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

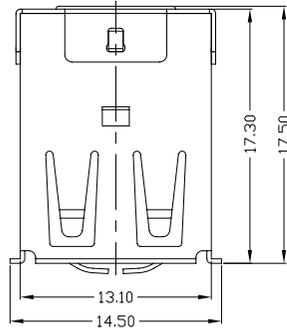

RECOMMENDED PCB LAYOUT



- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Umating Force: 10N MIN.
 - DIMENSIONS MARKED '▼' TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-08*N-1*R303
 1Au 1U'
 6Au 30U'
 W/WHITE
 B/BLACK
 1PBT
 2PA6T
 3PA9T
 4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.' ±2'	UNITS	东莞市铀高电子制品有限公司							
4	CLIP	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X' ±1'	mm	TITLE: USB AF 90° 双层半包(直脚2.4)双弹 PART NO.: USAF-08*N-1*R303 DR: gan 2014/09/16 DWG NO.: AII-R303 CHKD: gan 2014/09/16 APPD:							
3	HOUSING	PBT+30%GF	1	UL94V-0	.XX ±0.25	.XX'	MAT'L					SCALE	SHEET	REV.	CUSTOMER
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX'	SEE NOTE					1:1	1/1	B	DRAWING
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN			SEE NOTE								
							FINISH								
							Q'TY								
							THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.								