

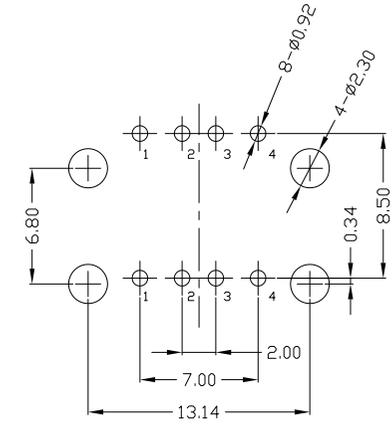
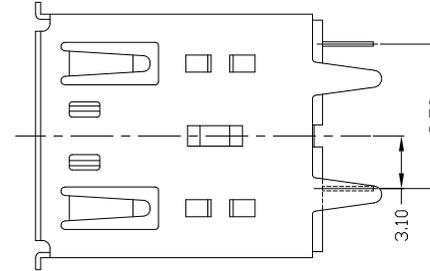


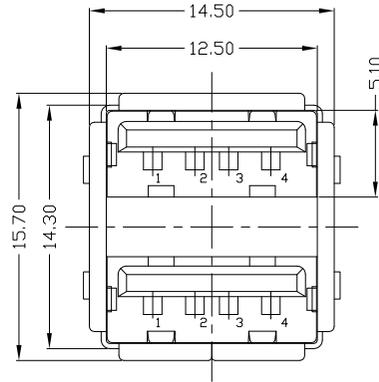


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

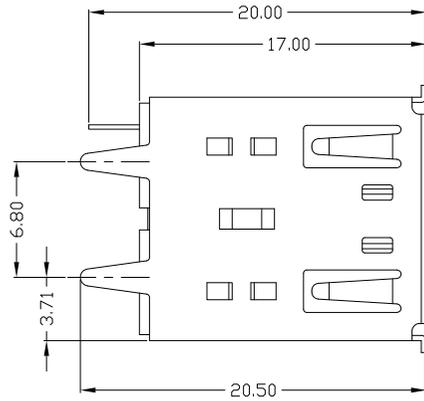

RECOMMENDED PCB LAYOUT

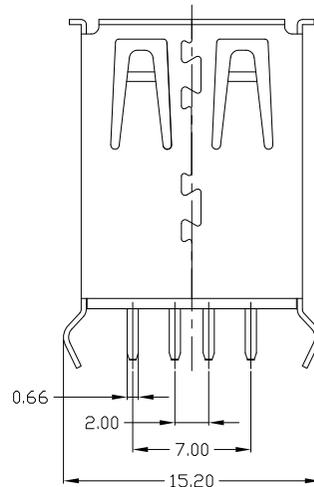

- NOTES:
1. ELECTRICAL:
    - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
    - 2) INSULATION RESISTANCE: 1000MΩMIN;
    - 3) CONTACT RESISTANCE: 30mΩMAX;
    - 4) WITHSTANDING VOLTAGE: 500V AC;
    - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
  2. Mechanical:
    - 1) Mating Force: 35N MAX
    - 2) Unmating Force: 10N MIN.
  3. DIMENSIONS MARKED '▼' TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-08\*N-1\*P30

- 1: Au 10"
- 6: Au 300"
- W: WHITE
- B: BLACK
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X	X'	UNITS
4	CLIP	COPPER ALLOY	1	PLATED NICKEL	±0.35	±2'	mm
3	HOUSING	PBT+30%GF	1	UL94V-0	±0.3	±1'	MAT'L
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	±0.25	'	SEE NOTE
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	±0.15	'	FINISH
							SEE NOTE
							Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.

<b>东莞市铀高电子制品有限公司</b>			
TITLE: USB AF 180度双层插板长体(015)		PART NO.: USAF-08*N-1*P30	
DR: gan 2014/09/26		DWG NO.: AII-P30	
CHKD: gan 2014/09/26		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	

