

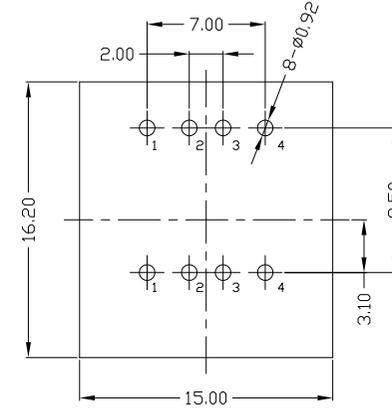



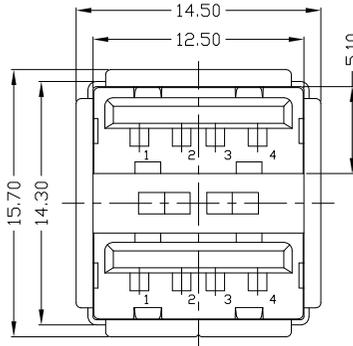


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

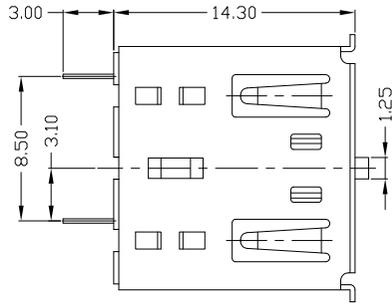

RECOMMENDED PCB LAYOUT

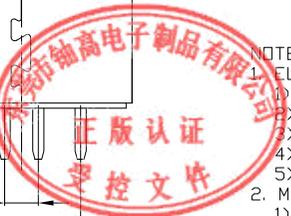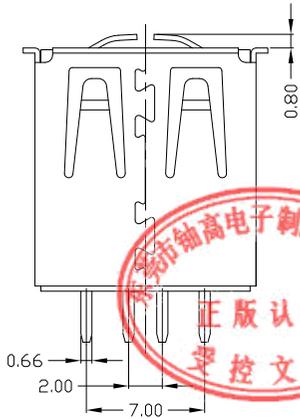


- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
- USAF-08*N-1*P35
- 14Au 10"
 - 6Au 30U"
 - W/WHITE
 - B/BLACK
 - 1PBT
 - 2PA6T
 - 3PA9T
 - 4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING							
4	CLIP	COPPER ALLOY	1	PLATED NICKEL	X. ±0.35	X.' ±2'	UNITS	mm	东莞市铀高电子制品有限公司 TITLE: USB AF 180° 双层插板短体 (双弹) 成品 PART NO.: USAF-08*N-1*P35 DR: gan 2014/09/26 DWG NO.: AII-P35 CHKD: gan 2014/09/26 APPD:		
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X' ±1'	MAT'L	SEE NOTE			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	FINISH	SEE NOTE			
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	Q'TY				
NO	PARTS	MATERIAL	QTY	FINISHING							

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.



SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	