

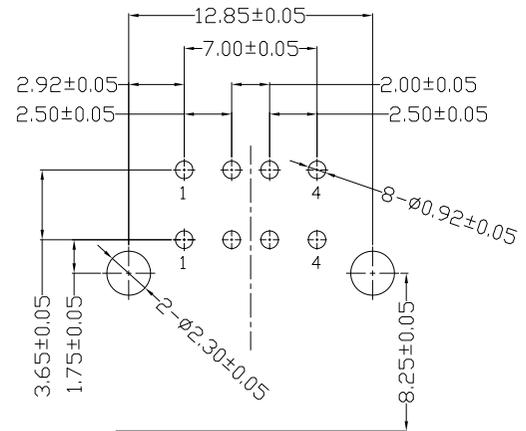
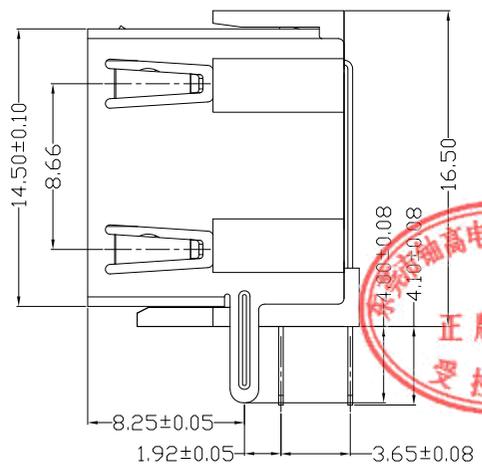


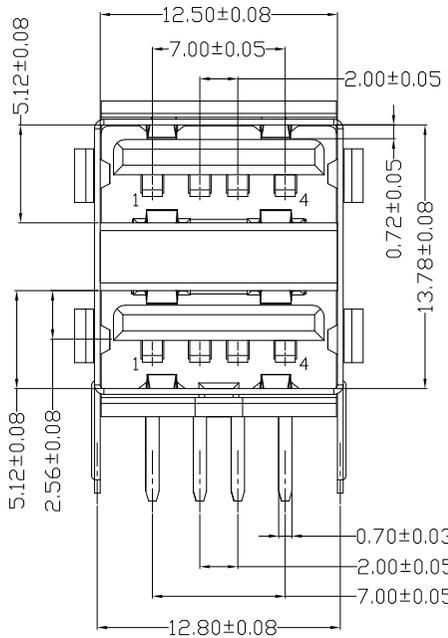

RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

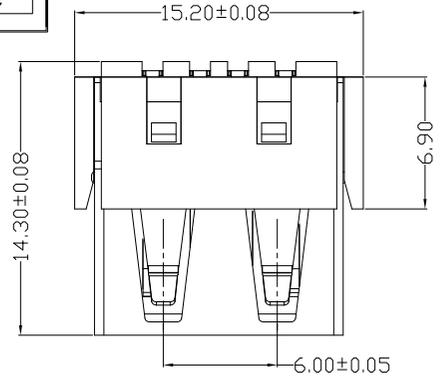

RECOMMENDED PCB LAYOUT



NOTES:
1. ELECTRICAL:
1) VOLTAGE CURRENT RATING: 2AMP, 30V DC;
2) INSULATION RESISTANCE: 1000MΩ MIN;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 500V AC FOR 1MIN;
5) OPERATING TEMPERATURE: -30°C TO +85°C.
2. Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAF-08*N-1*RJ50
1:Au 1U"
6:Au 30U"
W:WHITE
B:BLACK
1PBT
2PA6T
3PA9T
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5				X. ±0.15 X.* ±5*
4				.X ±0.10 .X.* ±2*
3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY / SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市铀高电子制品有限公司			
TITLE:	USB AF 双层壳体90度 正向平口	PART NO.:	USAF-08XN-1XRJ50
DR:	Ricky 2019/08/21	DWG NO.:	AII-RJ50
CHKD:	Ricky 2019/08/21	SCALE	1:1
APPD:		SHEET	1/1
		REV.	B
		CUSTOMER DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATION INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATION INC.