

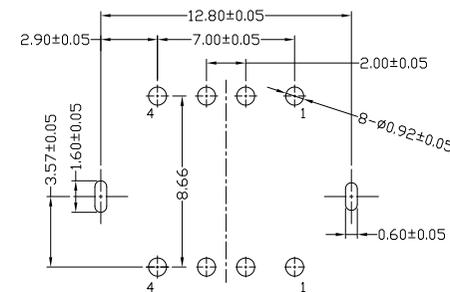
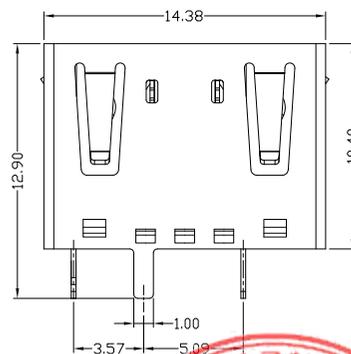


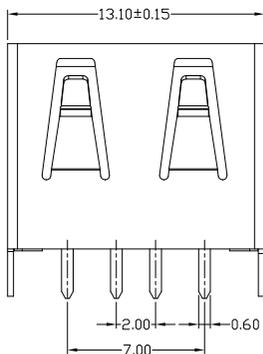


RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

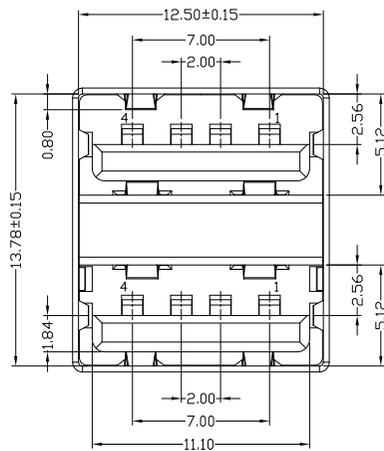

RECOMMENDED PCB LAYOUT



NOTES

- 1.ELECTRICAL:
  - 1)VOLTAGE CURRENT RATING:2AMP,30V AC;
  - 2)INSULATION RESISTANCE: 1000MΩ MIN;
  - 3)CONTACT RESISTANCE: 30mΩ MAX;
  - 4)WITHSTANDING VOLTAGE: 500V AC FOR 1MIN;
  - 5)OPERATING TEMPERATURE:-55°C TO +85°C.
- 2.Mechanical:
  - 1)Mating Force: 35N MAX
  - 2)Unmating Force: 10N MIN.
- 3.DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-08\*N-1\*PU02  
 1:Au 1U"  
 6:Au 30U"  
 W:WHITE  
 B:BLACK  
 1:PBT  
 2:PA6T  
 3:PA9T  
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
4	CLIP	STAINLESS STEEL	1	
3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN

X.	X.*	UNITS
±0.35	±2°	mm
±0.30	±1°	MAT'L
±0.25	*	SEE NOTE
±0.15	*	FINISH
		SEE NOTE
		Q'TY

东莞市铀高电子制品有限公司			
TITLE: USB AF DIP 180度 双层短体10.4 无卷边 有脚		PART NO.: USAF-08XN-1XPU02	
DR: Ricky 2018/10/16		DWG NO.: AII-PU02	
CHKD: Ricky 2018/10/16		SCALE: 1:1	SHEET: 1/1
APPD:		REV: A	CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDDTECH INC

