




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

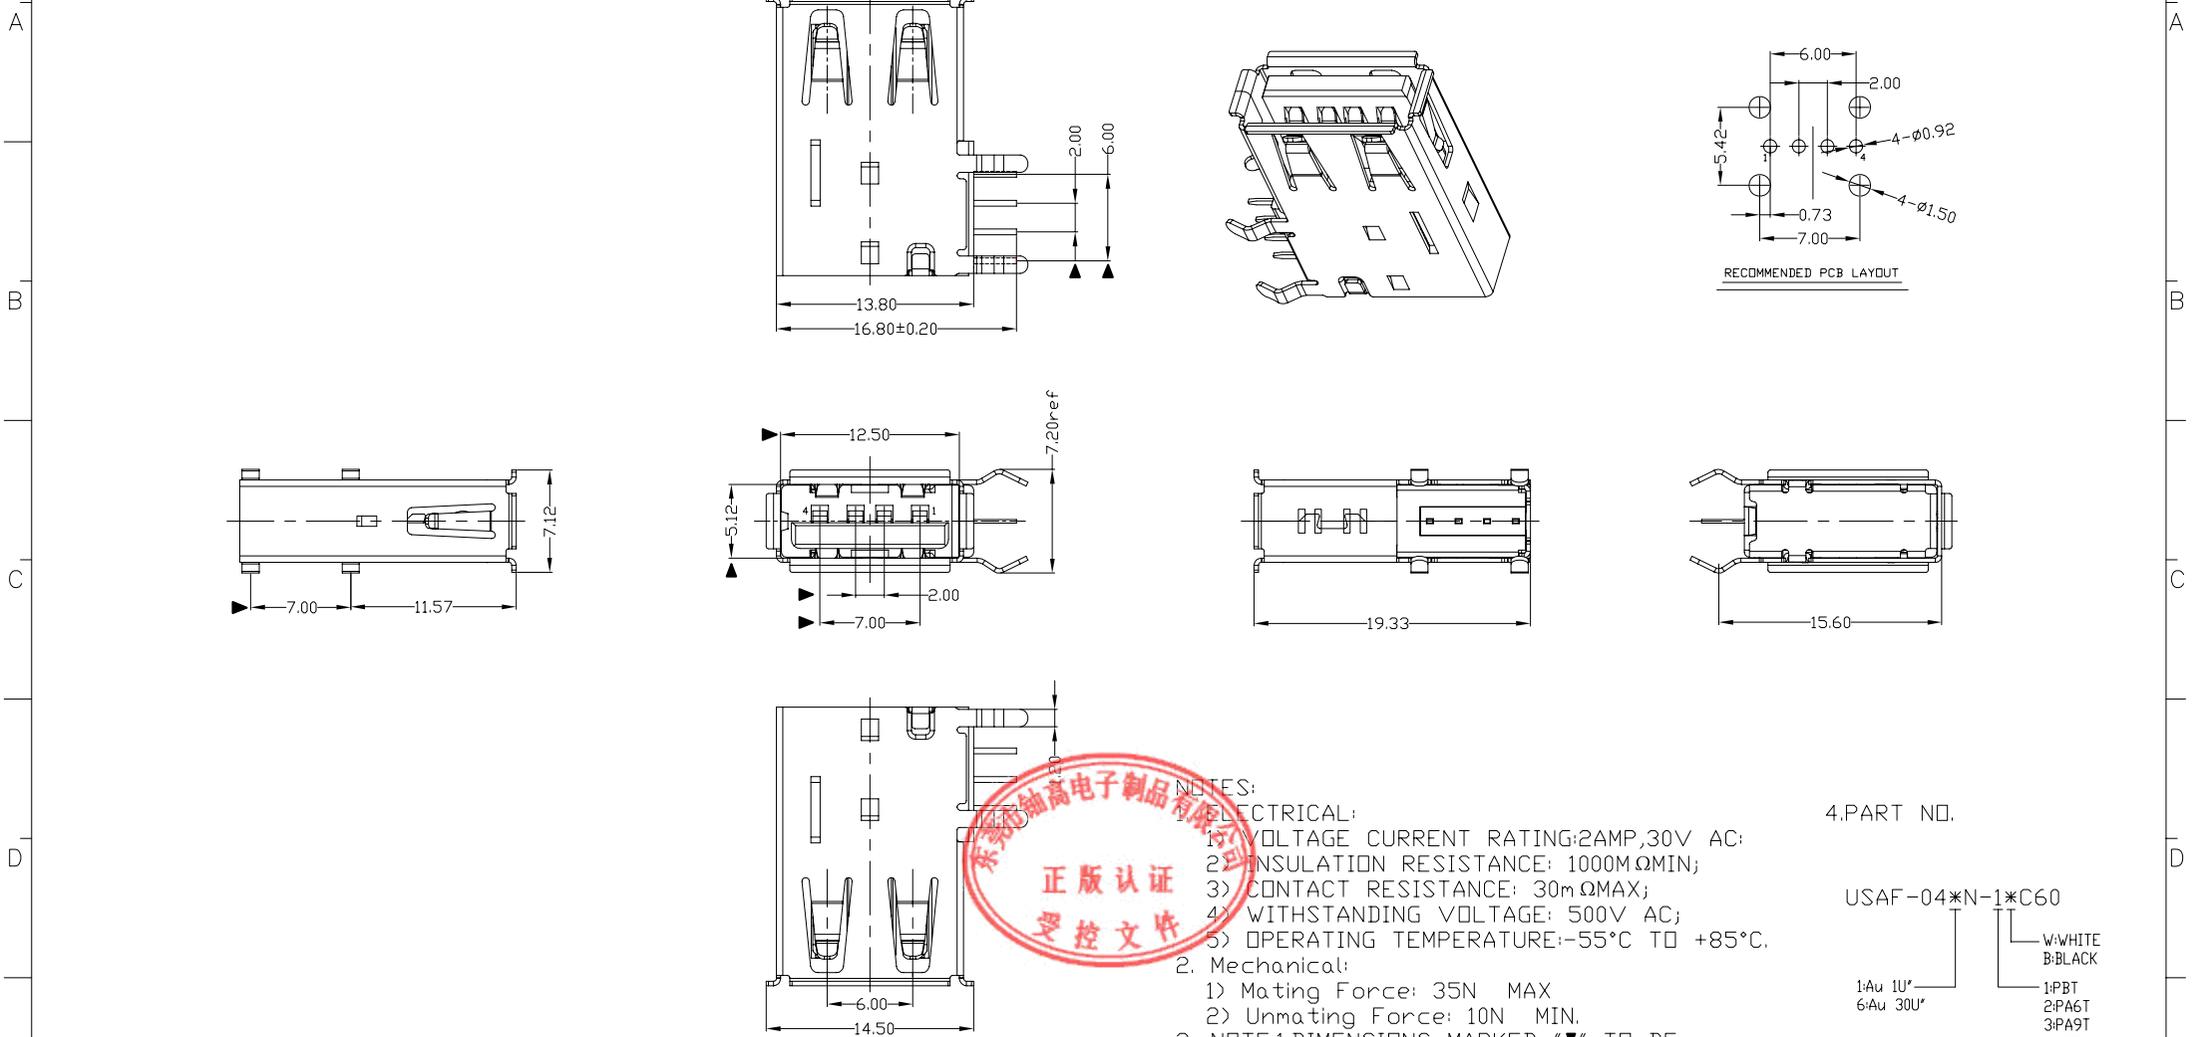

- NOTES:
- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 100MΩMIN;
 - 3) CONTACT RESISTANCE: 30mΩMAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAF-04*N-1*C60
W: WHITE
B: BLACK
1: Au 1U"
6: Au 30U"
1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

5	BACK COVER	SPCC	1	PLATED NICKEL	X. ±0.35	X.' ±2'	UNITS	mm
4	BOTTOM COVER	PBT	1	UL94V-0	.X ±0.30	.X' ±1'	MAT'L	
3	HOUSING	PBT	1	UL94V-0	.XX ±0.25	.XX'	SEE NOTE	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX'	FINISH	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN			SEE NOTE	
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	

东莞市铀高电子制品有限公司

TITLE:	USB A/F 90° DIP侧插长体	PART NO.:	USAF-04*N-1*C60
DR:	gan 2012/6/29	DWG NO.:	AII-C60
CHKD:	gan 2012/6/29	SCALE	SHEET
APPD:		1:1	1/1
		REV.	B
		CUSTOMER	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

