


REV.	ECN.	NO.	APPD.

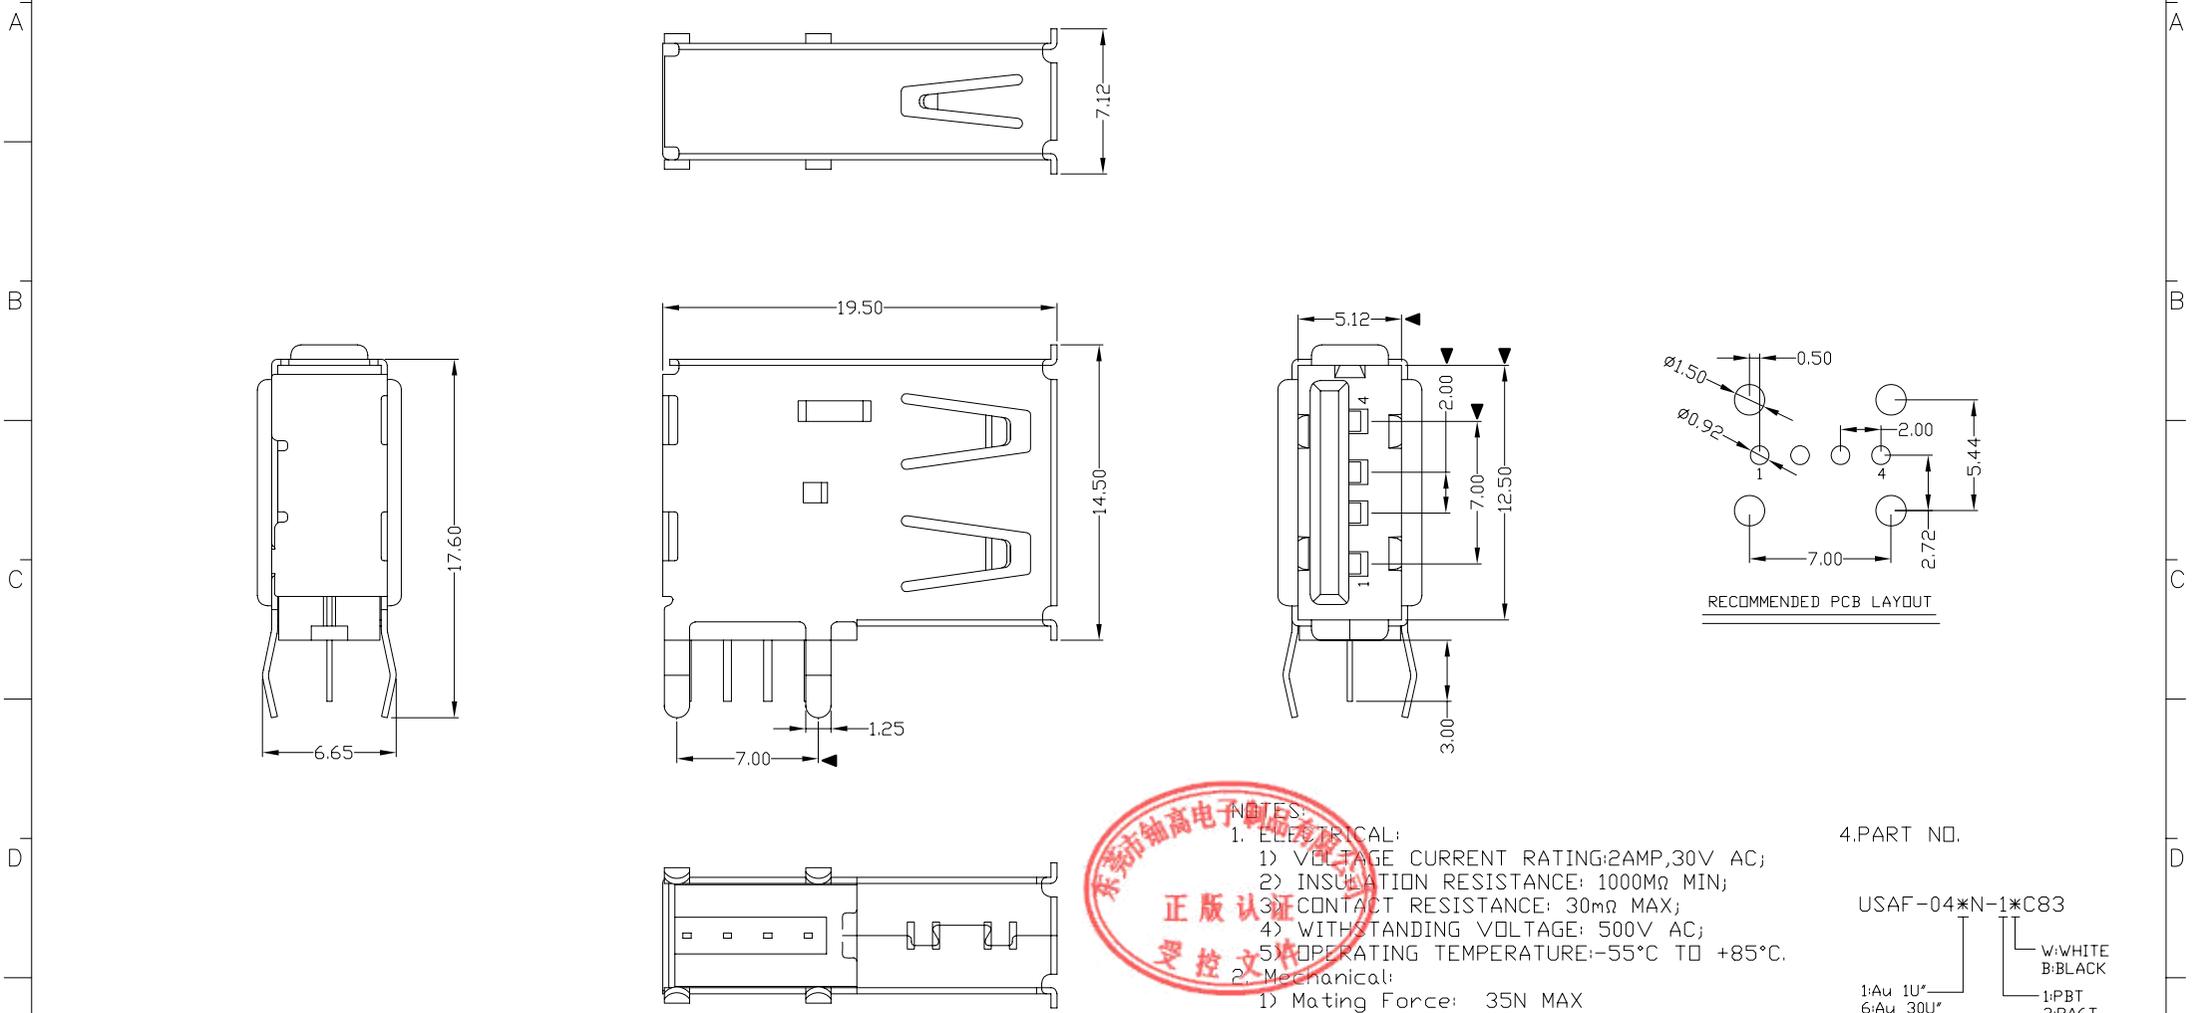

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*C83

1: Au 1U*
 6: Au 30U*

W: WHITE
 B: BLACK
 1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东 莞 市 铀 高 电 子 制 品 有 限 公 司				
5	BOTTOM COVER	PBT+30%GF	1	UL94V-0	X. ±0.35	X.* ±2*	MAT'L	TITLE: USB AF 90度 加后包(弯脚6.65、带后塞) 侧插长体		PART NO.: USAF-04*N-1*C83	
4	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X* ±1*					
3	BACK COVER	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	DR: gan 2012/12/13	SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING		
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX*	SEE NOTE	CHKD: gan 2012/12/13			APPD:
1	TERMINAL	COPPER ALLOY	4	Plated Gold in Mating Area; Tin on Solder Tails	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.		Q'TY	