

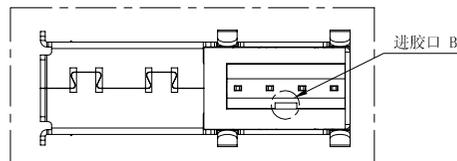
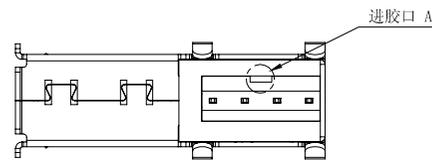
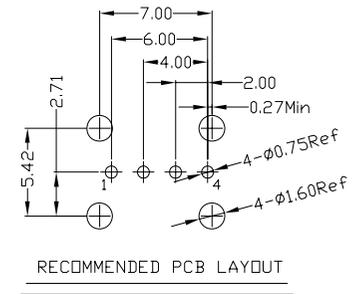


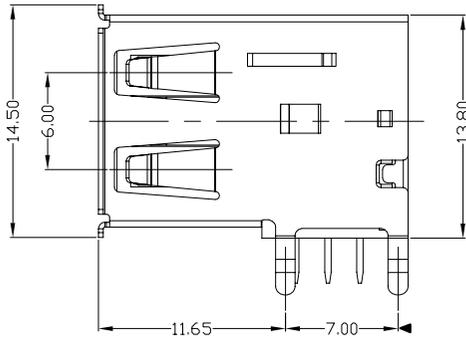
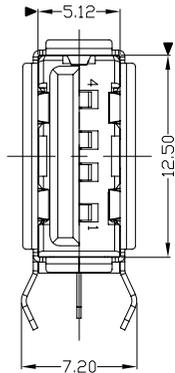




RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

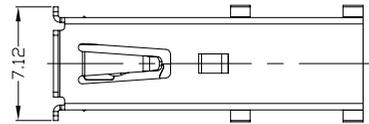

- NOTES:
- 1) ELECTRICAL:  
 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;  
 2) INSULATION RESISTANCE: 1000MΩ MIN;  
 3) CONTACT RESISTANCE: 30mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 500V AC;  
 5) OPERATING TEMPERATURE: -55°C TO +85°C.
- 2) Mechanical:  
 1) Mating Force: 35N MAX  
 2) Unmating Force: 10N MIN.
- 3) DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
 USAF-04\*N-1\*CA0

1:Au 1U"  
 6:Au 30U"

1:PBT  
 2:PA6T  
 3:PA9T  
 4:LCP

W:WHITE  
 B:BLACK

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5	BACK COVER	SPCC	1	PLATED NICKEL
4	BOTTOM COVER	PBT	1	UL94V-0
3	HOUSING	PBT	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

X	Y	UNITS
X ±0.35	X' ±2'	mm
.X ±0.3	.X' ±1'	MAT'L
.XX ±0.25	.XX'	SEE NOTE
.XXX ±0.15	.XXX'	FINISH
SEE NOTE		Q'TY

**东莞市铀高电子制品有限公司**

TITLE: USB AF 侧插长体

PART NO.: USAF-04\*N-1\*CA0

DR: gan 2012/7/05

DWG NO.: AII-CA0

CHKD: gan 2012/7/05

APPD:

SCALE: 1:1

SHEET: 1/1

REV: B

CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC