






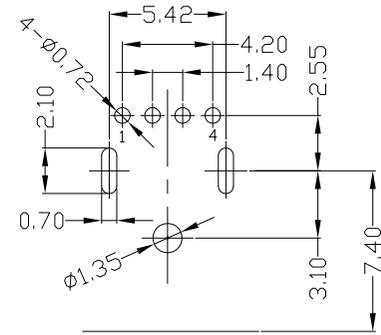


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

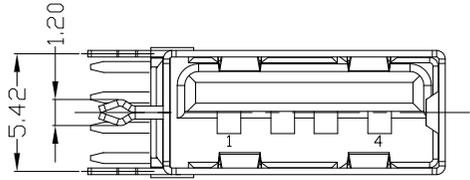


RECOMMEND PCB LAYOUT

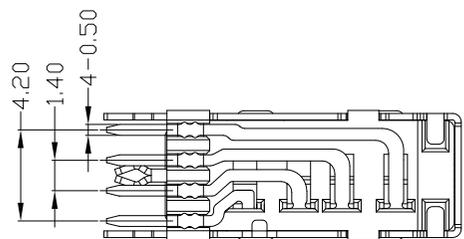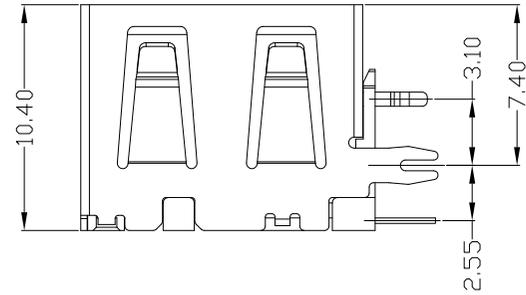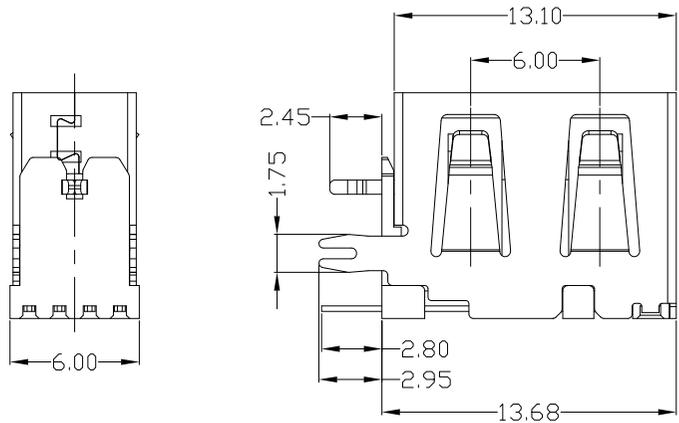

- NOTES:
1. ELECTRICAL:
- VOLTAGE CURRENT RATING: 2.0AMP,30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
- Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.* ±2*	UNITS	mm	东莞市铀高电子制品有限公司						
3	HOUSING	LCP/PBT+30%GF	1	UL94V-0	.X ±0.35	.X.* ±2*	MAT'L	SEE NOTE	TITLE:		PART NO.:				
2	SHELL	COPPER ALLOY	1	PLATED TIN/NICKEL	.XX ±0.25	.XX.*	FINISH	SEE NOTE	USB AF 侧插短体10.5 平口		USAF-04XN-4XCA9				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX.*	Q'TY	SEE NOTE	DR: gan 2017/3/15		DWG NO.:				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC								CHKD: gan 2017/3/15		AII-CA9					
APPD:								SCALE		SHEET		REV.		CUSTOMER DRAWING	
								1:1		1/1		B			