



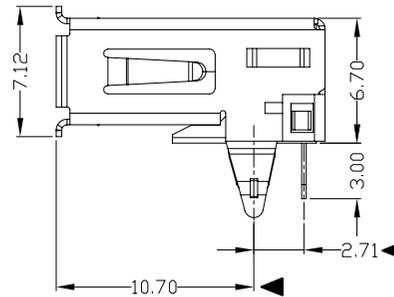
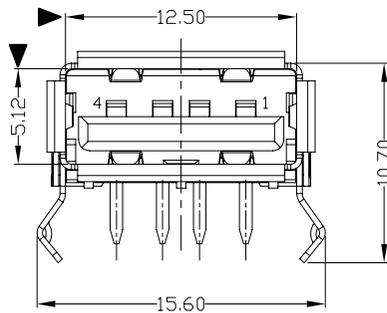
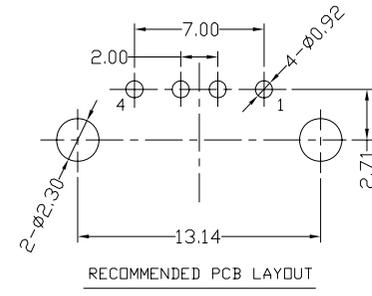




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

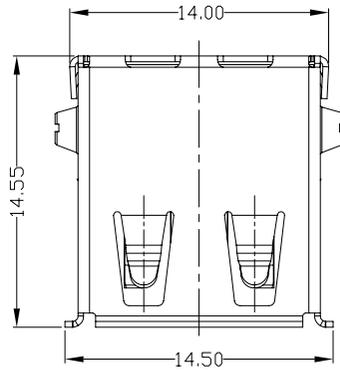

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 2AMP,30V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE:-55°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4.PART NO.

USAF-04\*N-1\*R65

W:WHITE  
B:BLACK  
1:Au 1U\*  
6:Au 30U\*  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

3	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS	mm	东莞市铀高电子制品有限公司				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.30	.X* ±1*	MAT'L	SEE NOTE					TITLE:
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX*	FINISH	SEE NOTE	USB A/F DIP 90° 胶芯反向 弯脚	USAF-04*N-1*R65			
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE	DR: gan 2012/6/29	DWG NO.:			
								APPD: gan 2012/6/29	SCALE	SHEET	REV.	CUSTOMER DRAWING	
								1:1	1/1	B			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.