




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

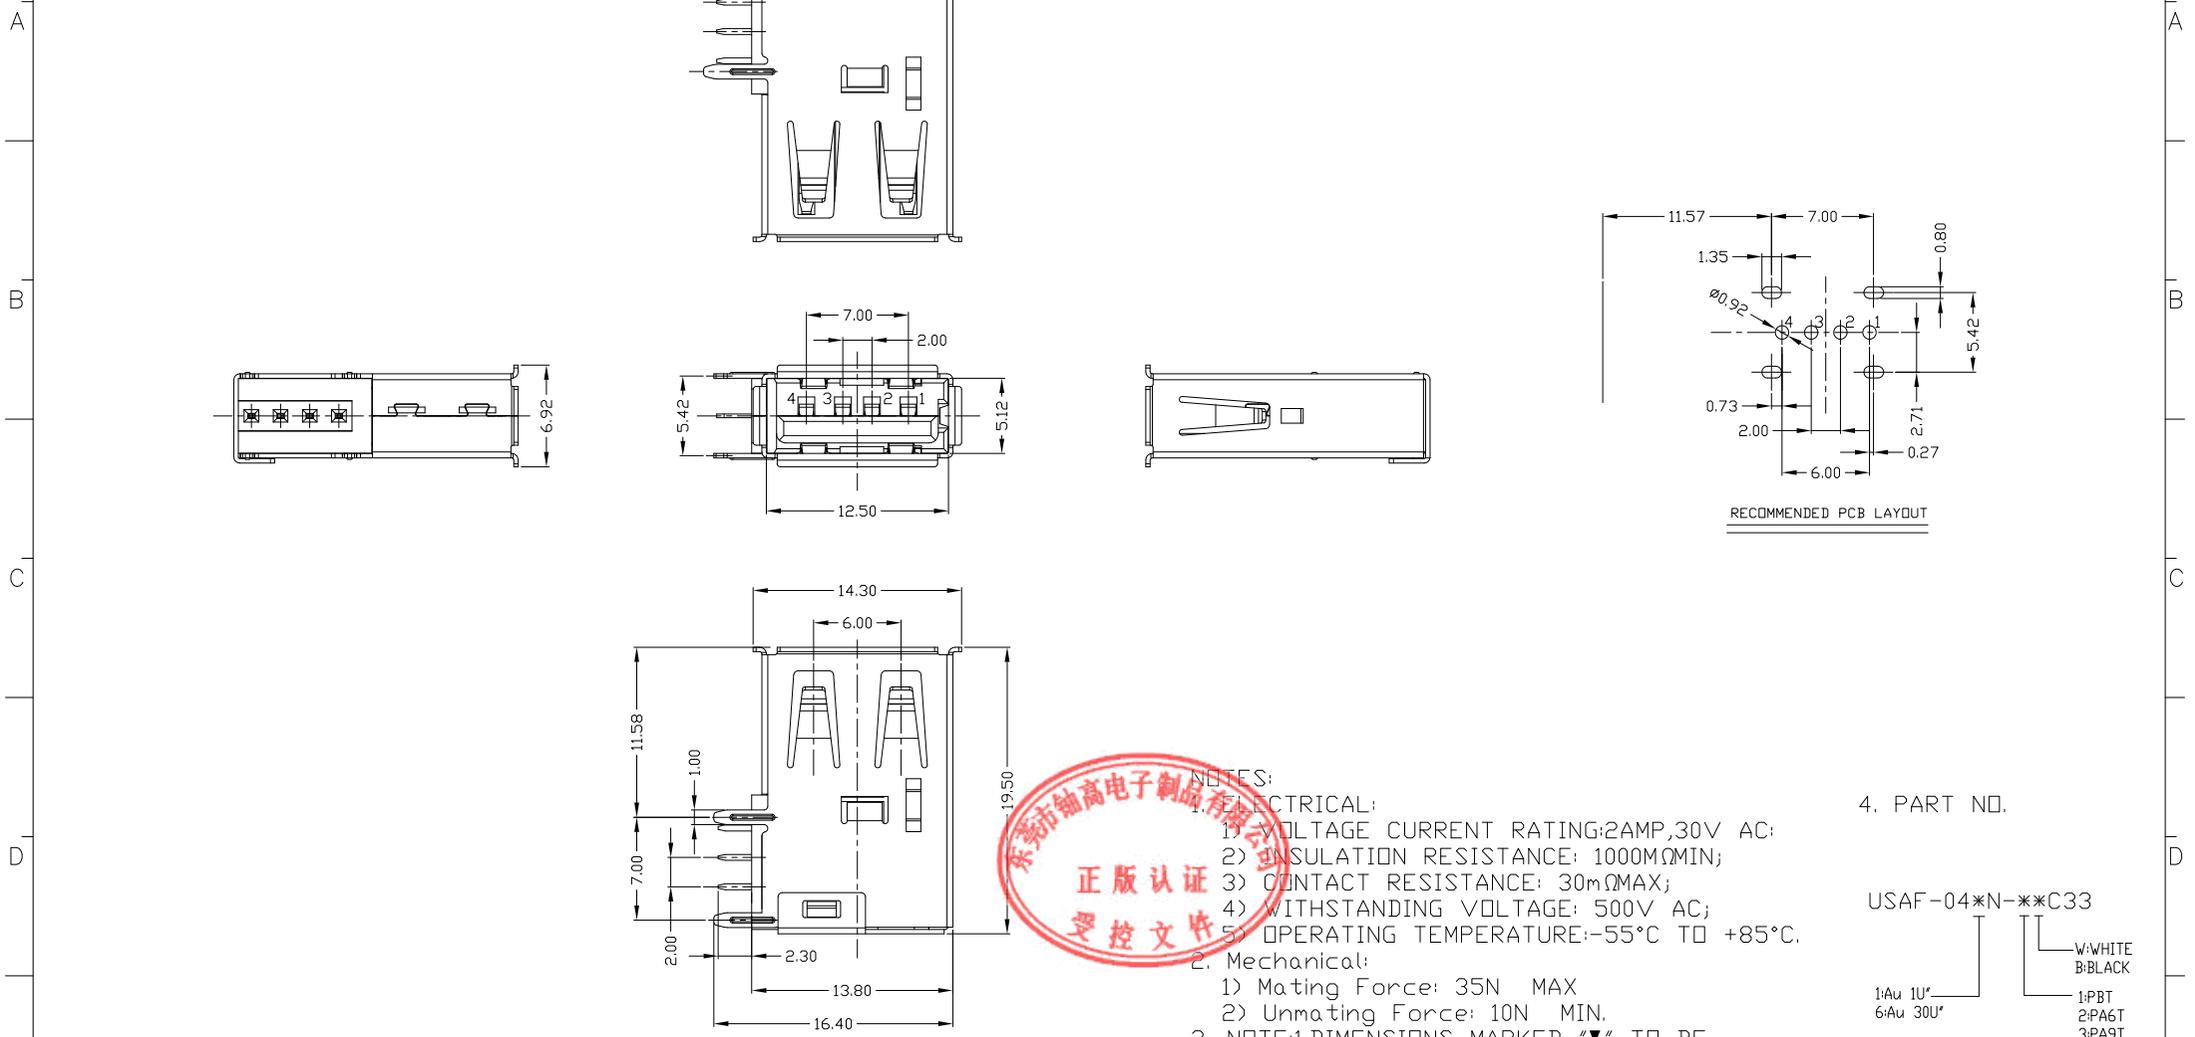

- NOTES:
1. ELECTRICAL:
    - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
    - 2) INSULATION RESISTANCE: 1000MΩMIN;
    - 3) CONTACT RESISTANCE: 30mΩMAX;
    - 4) WITHSTANDING VOLTAGE: 500V AC;
    - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
  2. Mechanical:
    - 1) Mating Force: 35N MAX
    - 2) Unmating Force: 10N MIN.
  3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
USAF-04\*N-\*\*\*C33

1: WHITE  
2: BLACK

1: Au 1U\*  
2: Au 30U\*

1: PBT  
2: PA6T  
3: PA9T  
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2'	UNITS	mm	东莞市铀高电子制品有限公司					
3	HOUSING	PBT/LCP+30%GF	1	UL94V-0	.X ±0.3	.X* ±1'	MAT'L	SEE NOTE	TITLE: USB AF DIP 90度 侧立式长体 反向 卷边有后盖直脚		PART NO.: USAF-04*N-***C33			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	SEE NOTE	DR: gan 2018/3/6		DWG NO.: AII-C33			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE	CHKD: gan 2018/3/6		SCALE	SHEET	REV.	CUSTOMER
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.</small>								APPD:		1:1	1/1	B	DRAWING	