

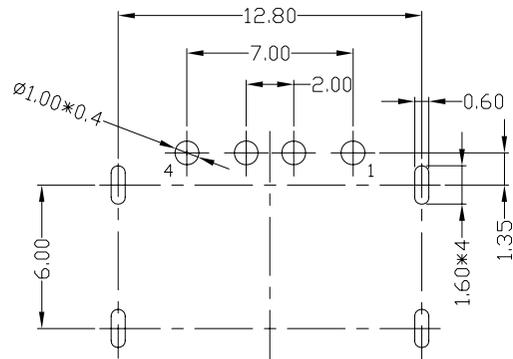
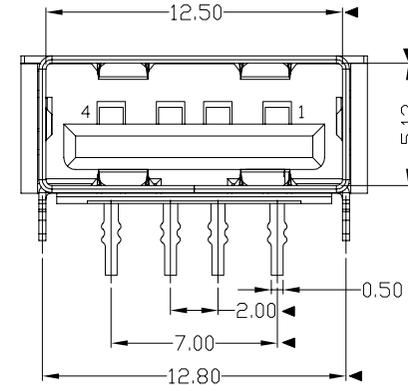


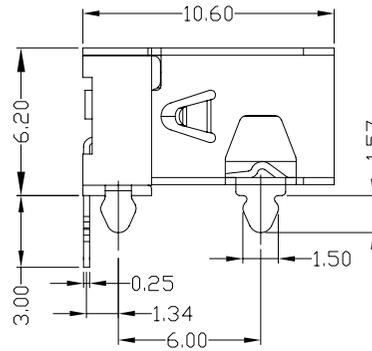


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

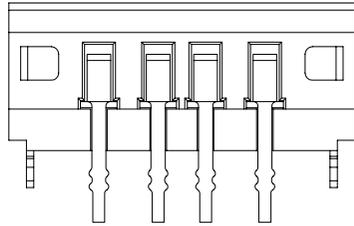

RECOMMENDED PCB LAYOUT

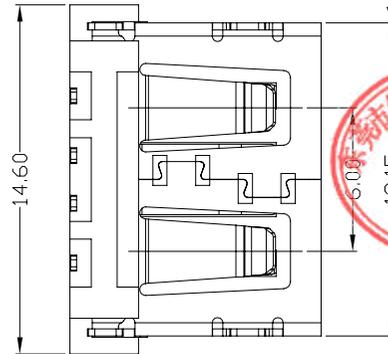

NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- INSULATION RESISTANCE: 1000M $\Omega$  MIN;
- CONTACT RESISTANCE: 30m $\Omega$  MAX;
- WITHSTANDING VOLTAGE: 500V AC;
- OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 10N MIN.

NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

2. PART NO.

USAF-04\*N-1\*R806

1: Au 1U\*  
6: Au 30U\*  
W: WHITE  
B: BLACK  
1: PBT  
2: PA6T  
3: PA9T  
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司				
3	HOUSING	PBT	1	UL94V-0	X. $\pm 0.35$	X.* $\pm 2^*$	MAT'L	TITLE: USB A/F 90° DIP 短體 反向 端子腳加長1.0		PART NO.: USAF-04*N-1*R806	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX $\pm 0.25$	.XX* $\pm 1^*$	SEE NOTE	DR: gan 2012/07/03		DWG NO.: AII-R806	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX $\pm 0.15$	.XXX*	SEE NOTE	CHKD: gan 2012/07/03		SCALE SHEET REV. CUSTOMER DRAWING	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.		Q'TY	APPD: gan 2012/07/03			