


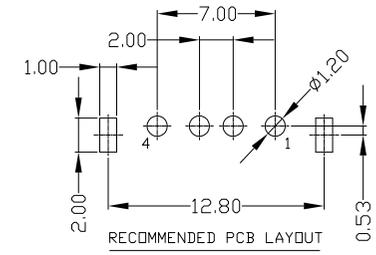
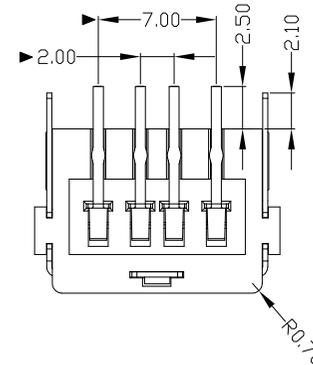



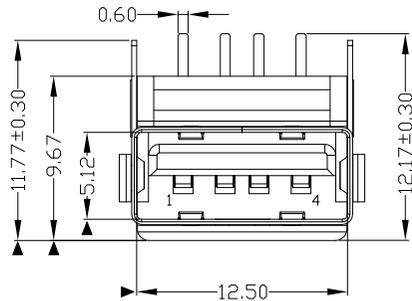

RoHS
Compliant
2002/95/EC

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
| | | | | | |



NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- INSULATION RESISTANCE: 1000MΩ MIN;
- CONTACT RESISTANCE: 30mΩ MAX;
- WITHSTANDING VOLTAGE: 500V AC;
- OPERATING TEMPERATURE: -55°C TO +85°C.

2. Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 7N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*RU06

1: Au 1U²
6: Au 30U²

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING | UNITS | mm | 东莞市铀高电子制品有限公司 | | | | |
|----|----------|--------------|-----|-----------------|---|---------|---------------|---------------------|-------|------------------|------------------|
| 3 | HOUSING | PBT | 1 | UL94V-0 | X. ±0.35 | X.' ±2' | SEE NOTE | TITLE: | | PART NO.: | |
| 2 | SHELL | COPPER ALLOY | 1 | PLATED NICKEL | .XX ±0.3 | .X' ±1' | | USB AF 加高短体 反向 平口 | | USAF-04*N-1*RU06 | |
| 1 | TERMINAL | COPPER ALLOY | 4 | PLATED GOLD/TIN | .XXX ±0.15 | .XXX' | | DR: gan 2012/7/05 | | DWG NO.: | |
| | | | | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC. | | SEE NOTE | CHKD: gan 2012/7/05 | | AII-RU06 | |
| | | | | | Q'TY | APPD: | SCALE | | SHEET | REV. | CUSTOMER DRAWING |
| | | | | | Φ - | | 1:1 | | 1/1 | B | |

