




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

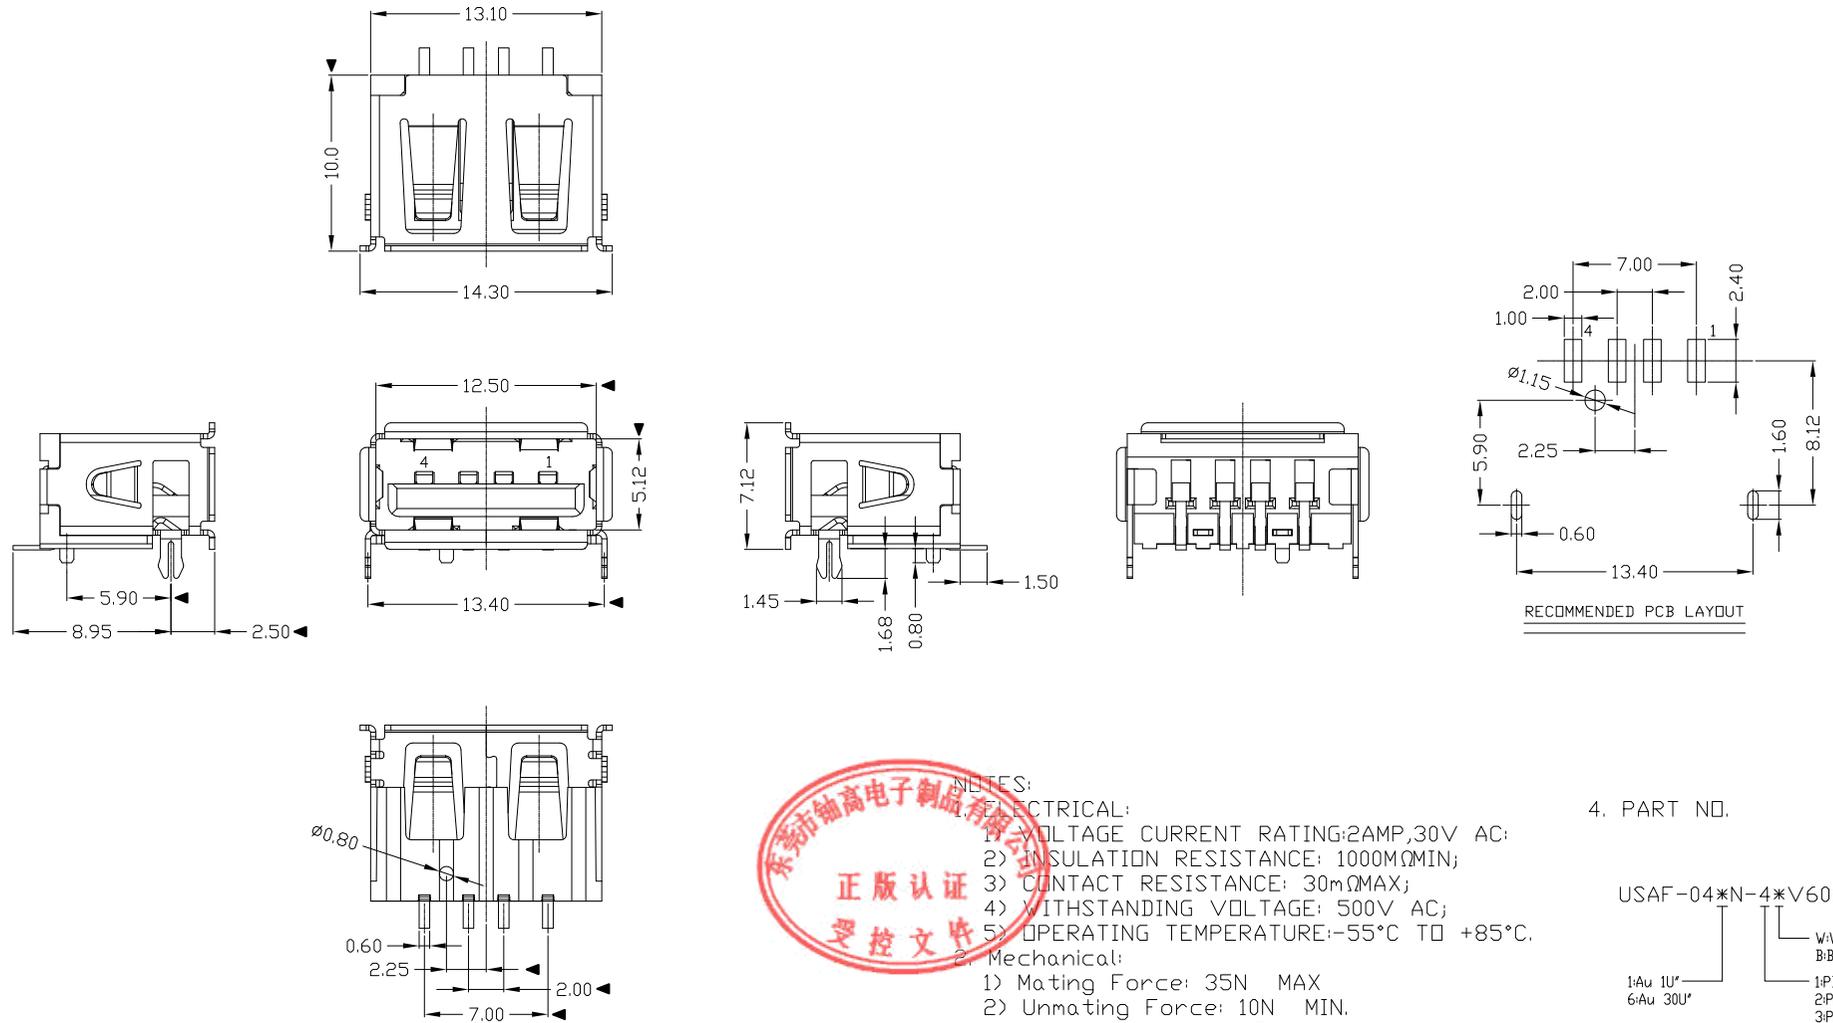

- NOTES:
- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩMIN;
 - 3) CONTACT RESISTANCE: 30mΩMAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 - 2) Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAF-04*N-4*V606

W: WHITE
B: BLACK

1: Au 1U*
6: Au 30U*

1: PB
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	LCP+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

X. ±0.35	X.' ±2'	UNITS	mm
.X ±0.3	.X' ±1'	MAT'L	SEE NOTE
.XX ±0.25	.XX'	FINISH	SEE NOTE
.XXX ±0.15	.XXX'	Q'TY	SEE NOTE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			
东莞市铀高电子制品有限公司 正版认证 受控文件		东莞市铀高电子制品有限公司	
TITLE:		PART NO.:	
USB AF SMT 10.0 反向 单柱 无耳朵		USAF-04*N-4*V606	
DR: gan 2014/12/10		DWG NO.:	
CHKD: gan 2014/12/10		AII-V606	
APPD:		SCALE	SHEET
APPD:		1:1	1/1
APPD:		REV.	CUSTOMER DRAWING
APPD:		B	CUSTOMER DRAWING