

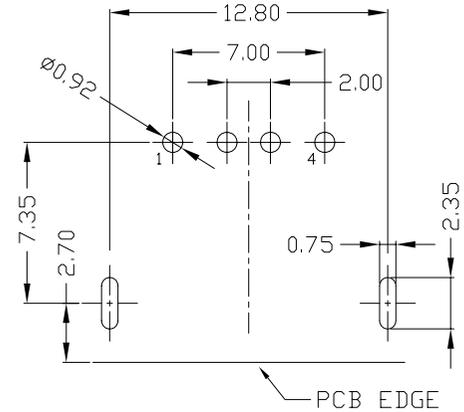

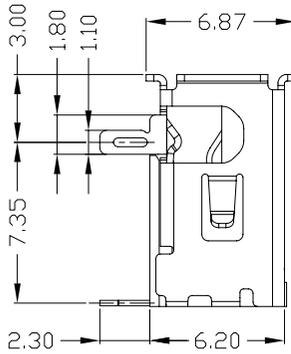


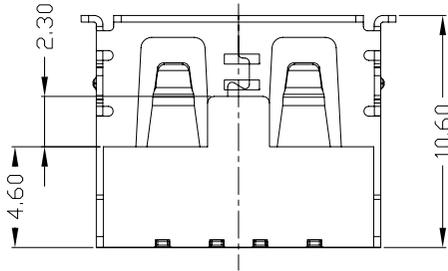


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

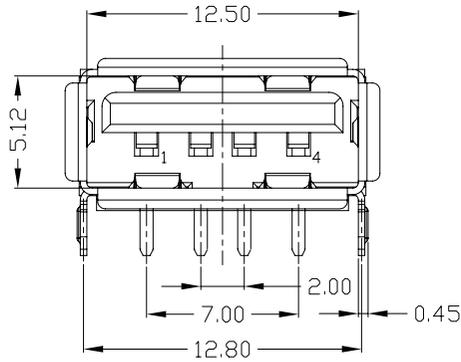


RECOMMENDED PCB LAYOUT

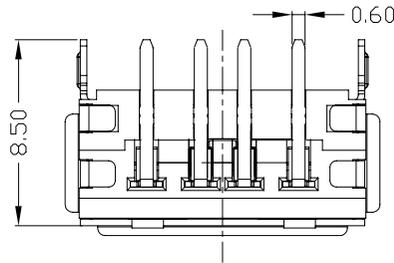

NOTES:

- 1) ELECTRICAL:
1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
2) INSULATION RESISTANCE: 1000MΩMIN;
3) CONTACT RESISTANCE: 30mΩMAX;
4) WITHSTANDING VOLTAGE: 500V AC;
5) OPERATING TEMPERATURE: -55°C TO +85°C.
- 2) Mechanical:
1) Mating Force: 35N MAX
2) Unmating Force: 10N MIN.
- 3) DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

X.	±0.35	X.' ±2'	UNITS	mm	东莞市铀高电子制品有限公司			
.X	±0.3	.X' ±1'	MAT'L	SEE NOTE	TITLE: USB AF 10.6 DIP 90度 厚6.20 卷边 两只前脚		PART NO.: USAF-04*N-1*R635	
.XX	±0.25	.XX'	FINISH	SEE NOTE	DR: gan 2016/9/20		DWG NO.: AII-R635	
.XXX	±0.15	.XXX'	Q'TY	SEE NOTE	CHKD: gan 2016/9/20		SCALE	SHEET
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.					APPD:		1:1	1/1
							REV.	CUSTOMER DRAWING
							B	