

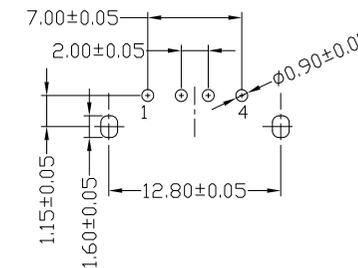
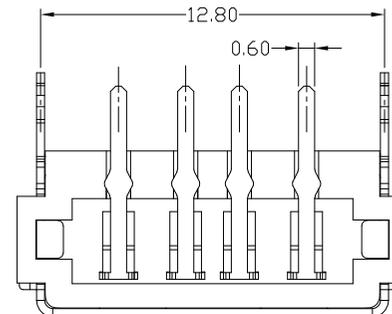
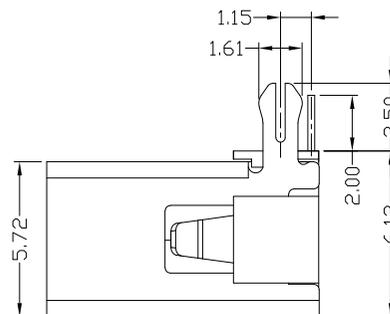
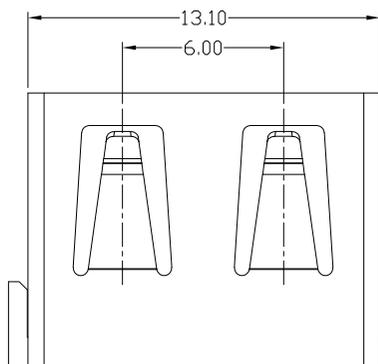


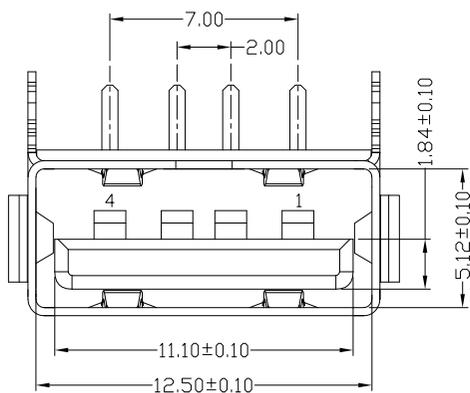

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

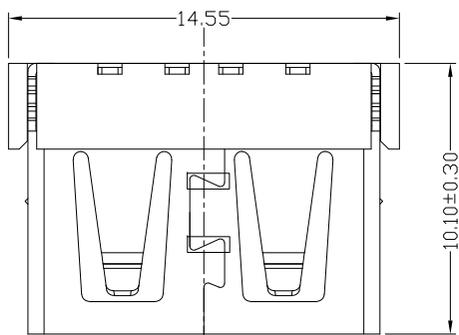

RECOMMENDED PCB LAYOUT



- NOTES:
- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC FOR 1MIN;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 - 2) Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 - 3) DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*RU09

1: Au 1U*
6: Au 30U*

W: WHITE
B: BLACK
O: ORANGE

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

UNITS mm				东莞市铀高电子制品有限公司			
MAT'L							
SEE NOTE				TITLE: USB AF DIP 90度 短体正向 无卷边 后两脚 减胶0.7		PART NO.: USAF-04XN-1XR09	
FINISH				DR: Ricky 2018/10/15		DWG NO.: AII-RU09	
SEE NOTE				CHKD: Ricky 2018/10/15		SCALE SHEET REV. CUSTOMER DRAWING	
Q'TY				APPD:		1:1 1/1 A	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INDDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDDTECH INC

