






RoHS
Compliant
2002/95/EC




REV.	ECN.	NO.	APPD.

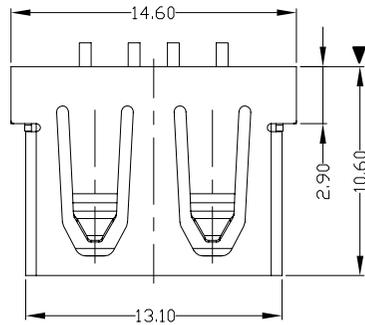


MYLAR 示意图

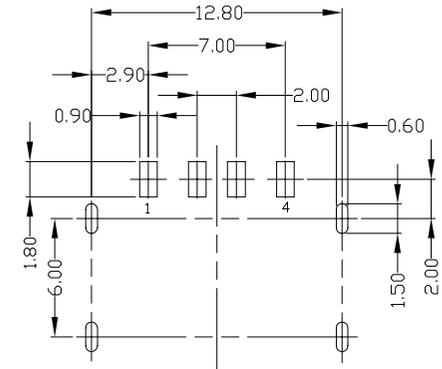

RECOMMENDED PCB LAYOUT



外壳铆合面视图



NOTES:

1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V67

- W: WHITE
 - B: BLACK
 - 1: PBT
 - 2: PA6T
 - 3: PA9T
 - 4: LCP
- 1:Au 1U"
6:Au 30U"

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	LCP	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC.

东莞市铀高电子制品有限公司			
TITLE: USB A/F 90° SMT 短体(10.6) 弹片尖角形		PART NO.: USAF-04*N-4*V67	
DR: gan 2012/6/30		DWG NO.: AII-V67	
CHKD: gan 2012/6/30		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	