

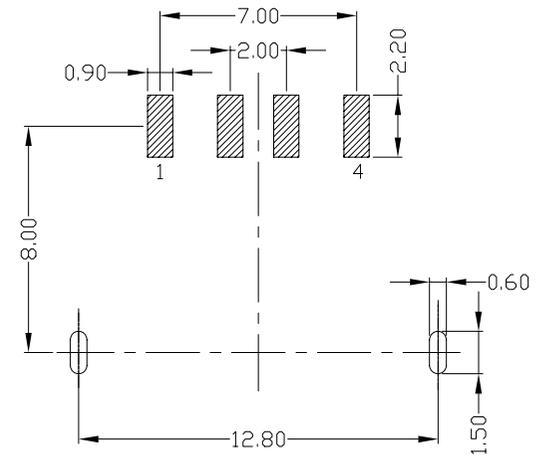


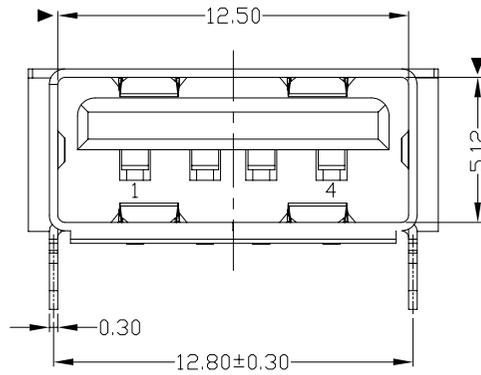


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

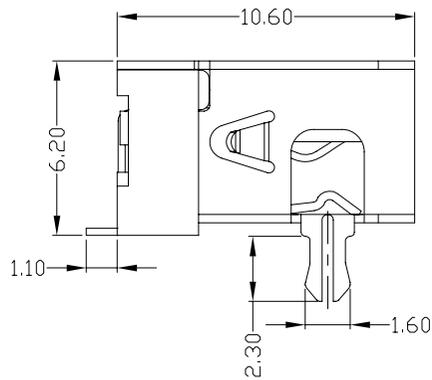

RECOMMENDED PCB LAYOUT

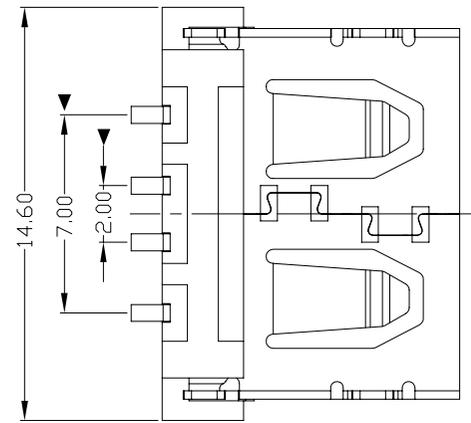

NOTES:

- 1) ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
- 2) Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



4. PART NO.

USAF-04*N-**V803

1:Au 1U"
6:Au 30U"

W: WHITE
B: BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

E	3	HOUSING	LCP/PBT	1	UL94V-0	X. ±0.35	X.* ±2*	UNITS	mm	东莞市铀高电子制品有限公司
	2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE	
	1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX*	FINISH	SEE NOTE	TITLE: USB A/F 90度 SMT 短体2脚 鱼叉脚(10.6正向)无卷边 PART NO.: USAF-04*N-**V803 DR: gan 2012/7/03 DWG NO.: AII-V803 CHKD: gan 2012/7/03 Q'TY APPD:
	NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX*			SCALE: 1:1 SHEET: 1/1 REV.: B CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

