

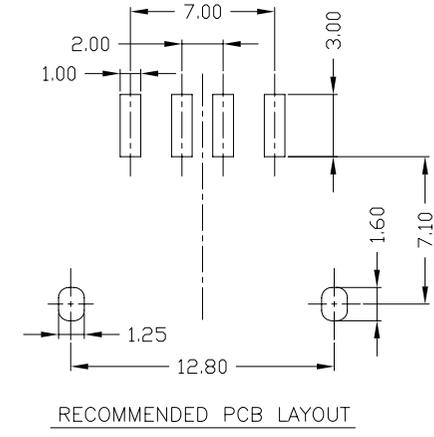







RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

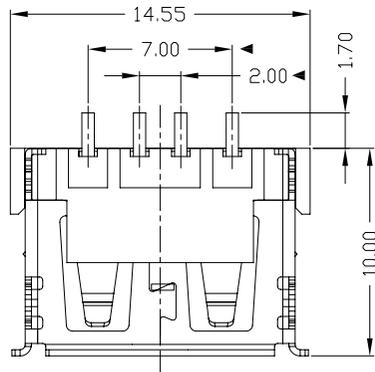

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USA-F-04*N-5*VU00

1:Au 1U"
6:Au 30U"

W: WHITE
B: BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP
5:PA46

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	MAT'L	FINISH	Q'TY	APPD:	TITLE:	PART NO.:	DRG NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING	
3	HOUSING	PA46/PBT+30%GF	1	UL94V-0	X. ±0.35	X.' ±2'	mm		东莞市铀高电子制品有限公司 长1.70MM(无缺口)	gan 2015/07/14 gan 2015/07/14	USAF-04*N-5*VU00	AII-VU00	1:1	1/1	B	CUSTOMER DRAWING	
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'	SEE NOTE										
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX'	SEE NOTE										
					.XXX ±0.15	.XXX'	SEE NOTE										
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.										APPD:							