


REV	LTR	DESCRIPTION	DATE	REVISER	APPD
B	△	尺寸变更	10/06/19	ganqingwen	
C	△	尺寸变更	10/07/08	ganqingwen	

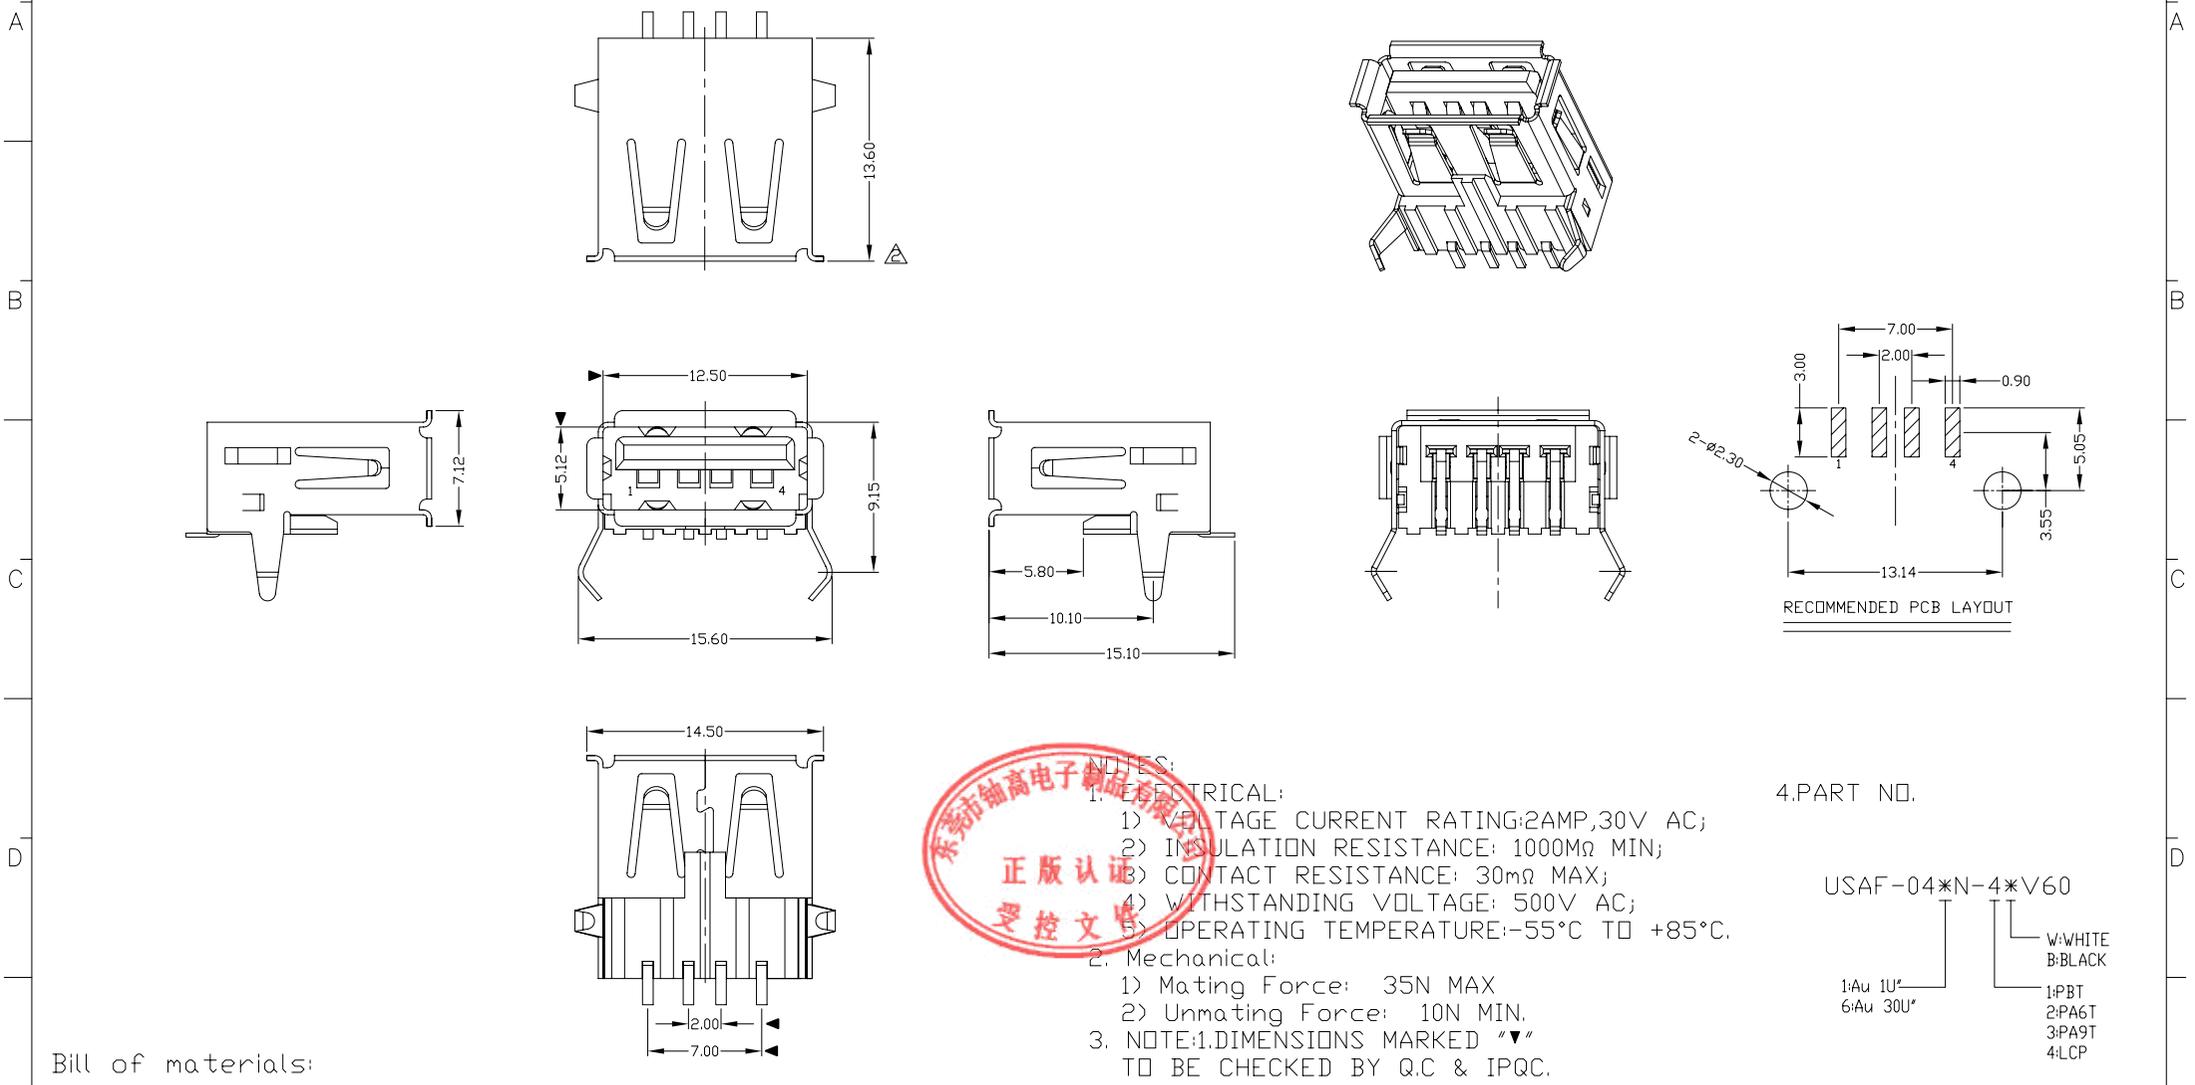

1. ELECTRICAL:
- VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
- Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
 USAF-04*N-4*V60
 1:Au 1U*
 6:Au 30U*
 W: WHITE
 B: BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	DIMENSIONS		UNITS	东莞市铀高电子制品有限公司					
					X. ±0.35	X.' ±2'						mm	
3	HOUSING	LCP	1	UL94V-0	.X ±0.3	.X' ±1'	MAT'L	TITLE: USB AF SMT 弯脚 T型		PART NO.: USAF-04*N-4*V60			
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE	DR: gan 2012/6/30		DWG NO.: AII-V60			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH	CHKD: gan 2012/6/30		SCALE SHEET REV. CUSTOMER DRAWING			
							Q'TY	APPD:		1:1	1/1	B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNGTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNGTECH INC