



RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

A

B

C




D

A






B

C

D

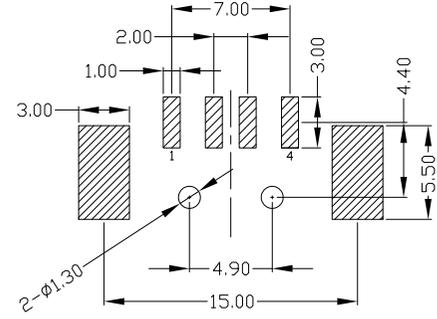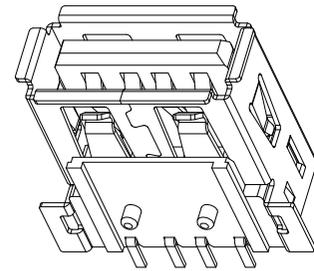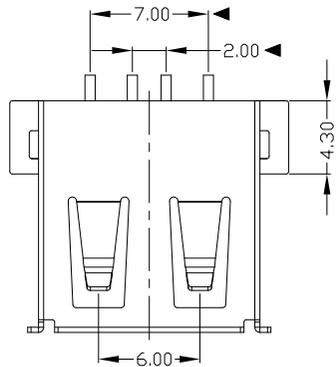

RECOMMENDED PCB LAYOUT

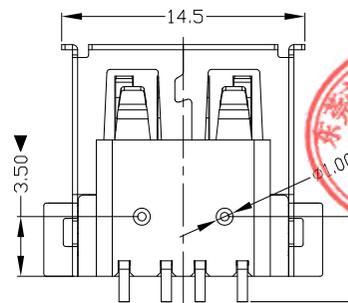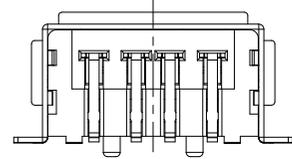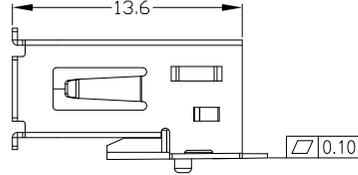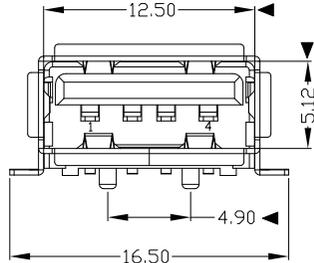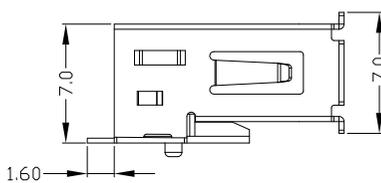

NOTES:  
ELECTRICAL:  
1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;  
2) INSULATION RESISTANCE: 1000MΩ MIN;  
3) CONTACT RESISTANCE: 30mΩ MAX;  
4) WITHSTANDING VOLTAGE: 500V AC;  
5) OPERATING TEMPERATURE: -55°C TO +85°C.  
MECHANICAL:  
1) Mating Force: 35N MAX  
2) Unmating Force: 10N MIN.  
3. NOTE: 1. DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
USAF-04\*N-4\*V61  
1#Au 1U\*  
6#Au 30U\*  
W: WHITE  
B: BLACK  
1#PT  
2#PA6T  
3#PA9T  
4#LCP

Bill of materials:

3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.' ±2'	UNITS	mm	东莞市铀高电子制品有限公司				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	MAT'L	SEE NOTE					TITLE:
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH	SEE NOTE	USB A/F SMT 全贴片脚	USAF-04*N-4*V61			
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.			Q'TY	DR: Ricky 2014/3/26	DWG NO.:			
								APPD: Ricky 2014/3/26	CHKD: Ricky 2014/3/26	SCALE	SHEET	REV.	CUSTOMER DRAWING
									1:1	1/1	B		

E

E

F

F