







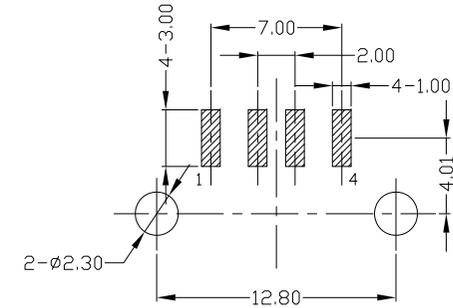


RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	APPROVED

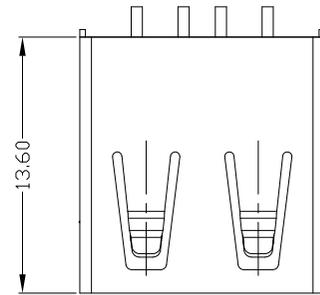

RECOMMENDED PCB LAYOUT

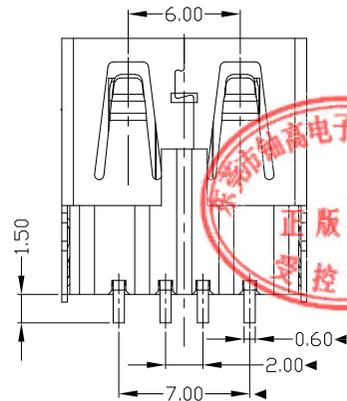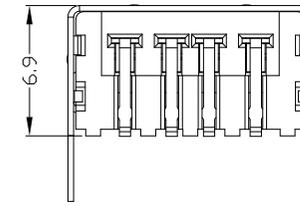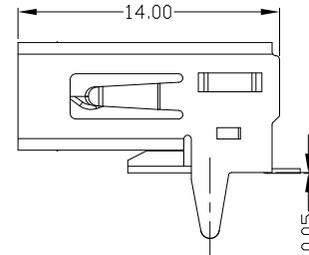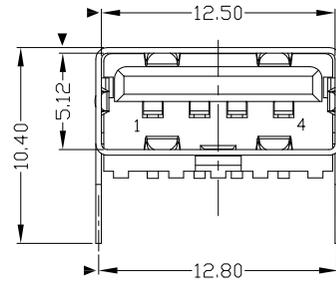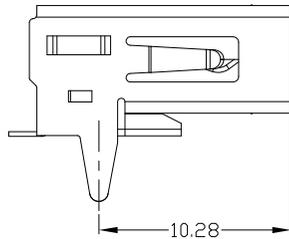

NOTES:

1. ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 2) INSULATION RESISTANCE: 1000MΩ MIN;
 3) CONTACT RESISTANCE: 30mΩ MAX;
 4) WITHSTANDING VOLTAGE: 500V AC;
 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
 1) Mating Force: 35N MAX
 2) Unmating Force: 10N MIN.
3. NOTE: 1. DIMENSIONS MARKED "▼"
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-4*V601

1: Au 1U"
 6: Au 30U"

W: WHITE
 B: BLACK

1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	HOUSING	LCP	1	UL 94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN

X.	±0.35	X.' ±2'	UNITS
.X	±0.3	.X' ±1'	mm
.XX	±0.25	.XX'	SEE NOTE
.XXX	±0.15	.XXX'	SEE NOTE
Q'TY			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC

UNITS				东 莞 市 铀 高 电 子 制 品 有 限 公 司			
TITLE:				PART NO.:			
USB AF SMT T型 直脚后盖平口				USAF-04*N-4*V601			
DR: Ricky 2014/04/10				DWG NO.:			
CHKD: Ricky 2014/04/10				AII-V601			
APPD:				SCALE	SHEET	REV.	CUSTOMER DRAWING
				1:1	1/1	B	