

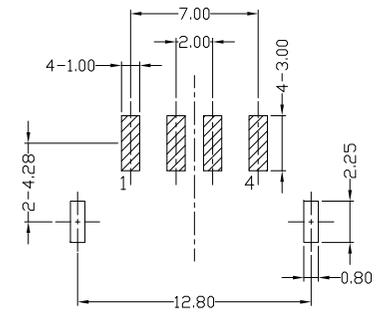

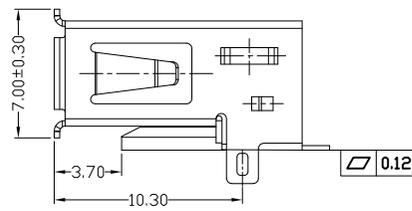
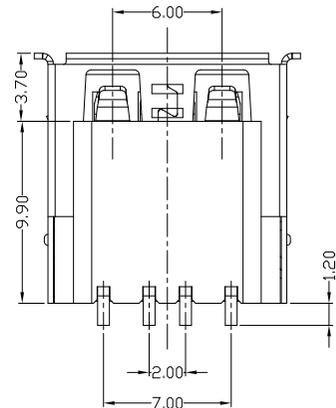


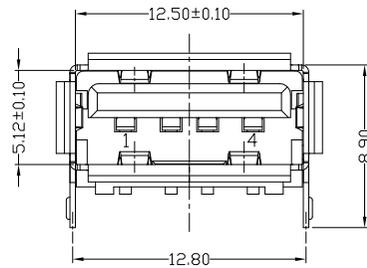

RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

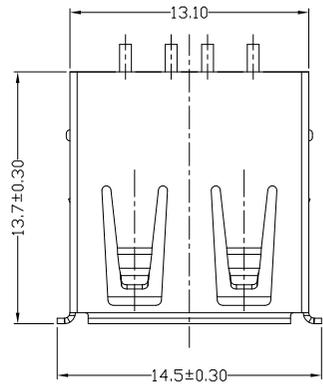

RECOMMENDED P.C.B. LAYOUT



NOTES:  
 1. ELECTRICAL:  
 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;  
 2) INSULATION RESISTANCE: 1000MΩ MIN;  
 3) CONTACT RESISTANCE: 30mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 500V AC;  
 5) OPERATING TEMPERATURE: -55°C TO +85°C.  
 2. Mechanical:  
 1) Mating Force: 35N MAX  
 2) Unmating Force: 10N MIN.  
 3. DIMENSIONS MARKED "▼"  
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
 USAF-04\*N-4XV613  
 1: Au 1U\*  
 6: Au 30U\*  
 W: WHITE  
 B: BLACK  
 1: PBT  
 2: PA6T  
 3: PA9T  
 4: LCP

5				.X ±0.30	.X' ±1'	UNITS	mm
4				.XX ±0.20	.XX'	MAT'L	
3	HOUSING	LCP+30%GF	1	UL94V-0	.XXX ±0.10	.XXX'	SEE NOTE
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL			SEE NOTE
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN			
NO	PARTS	MATERIAL	QTY	FINISHING			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVATECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVATECH INC.

<b>东莞市铀高电子制品有限公司</b>			
TITLE: USB AF SMT 型直脚有凸包无柱 端子外露1.20		PART NO.: USAF-041N-4XV613	
DR: Ricky 2017/12/13		DWG NO.: AII-V613	
CHKD: Ricky 2017/12/13		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	