



REV	LTR	DESCRIPTION	DATE	REVISER	APPD

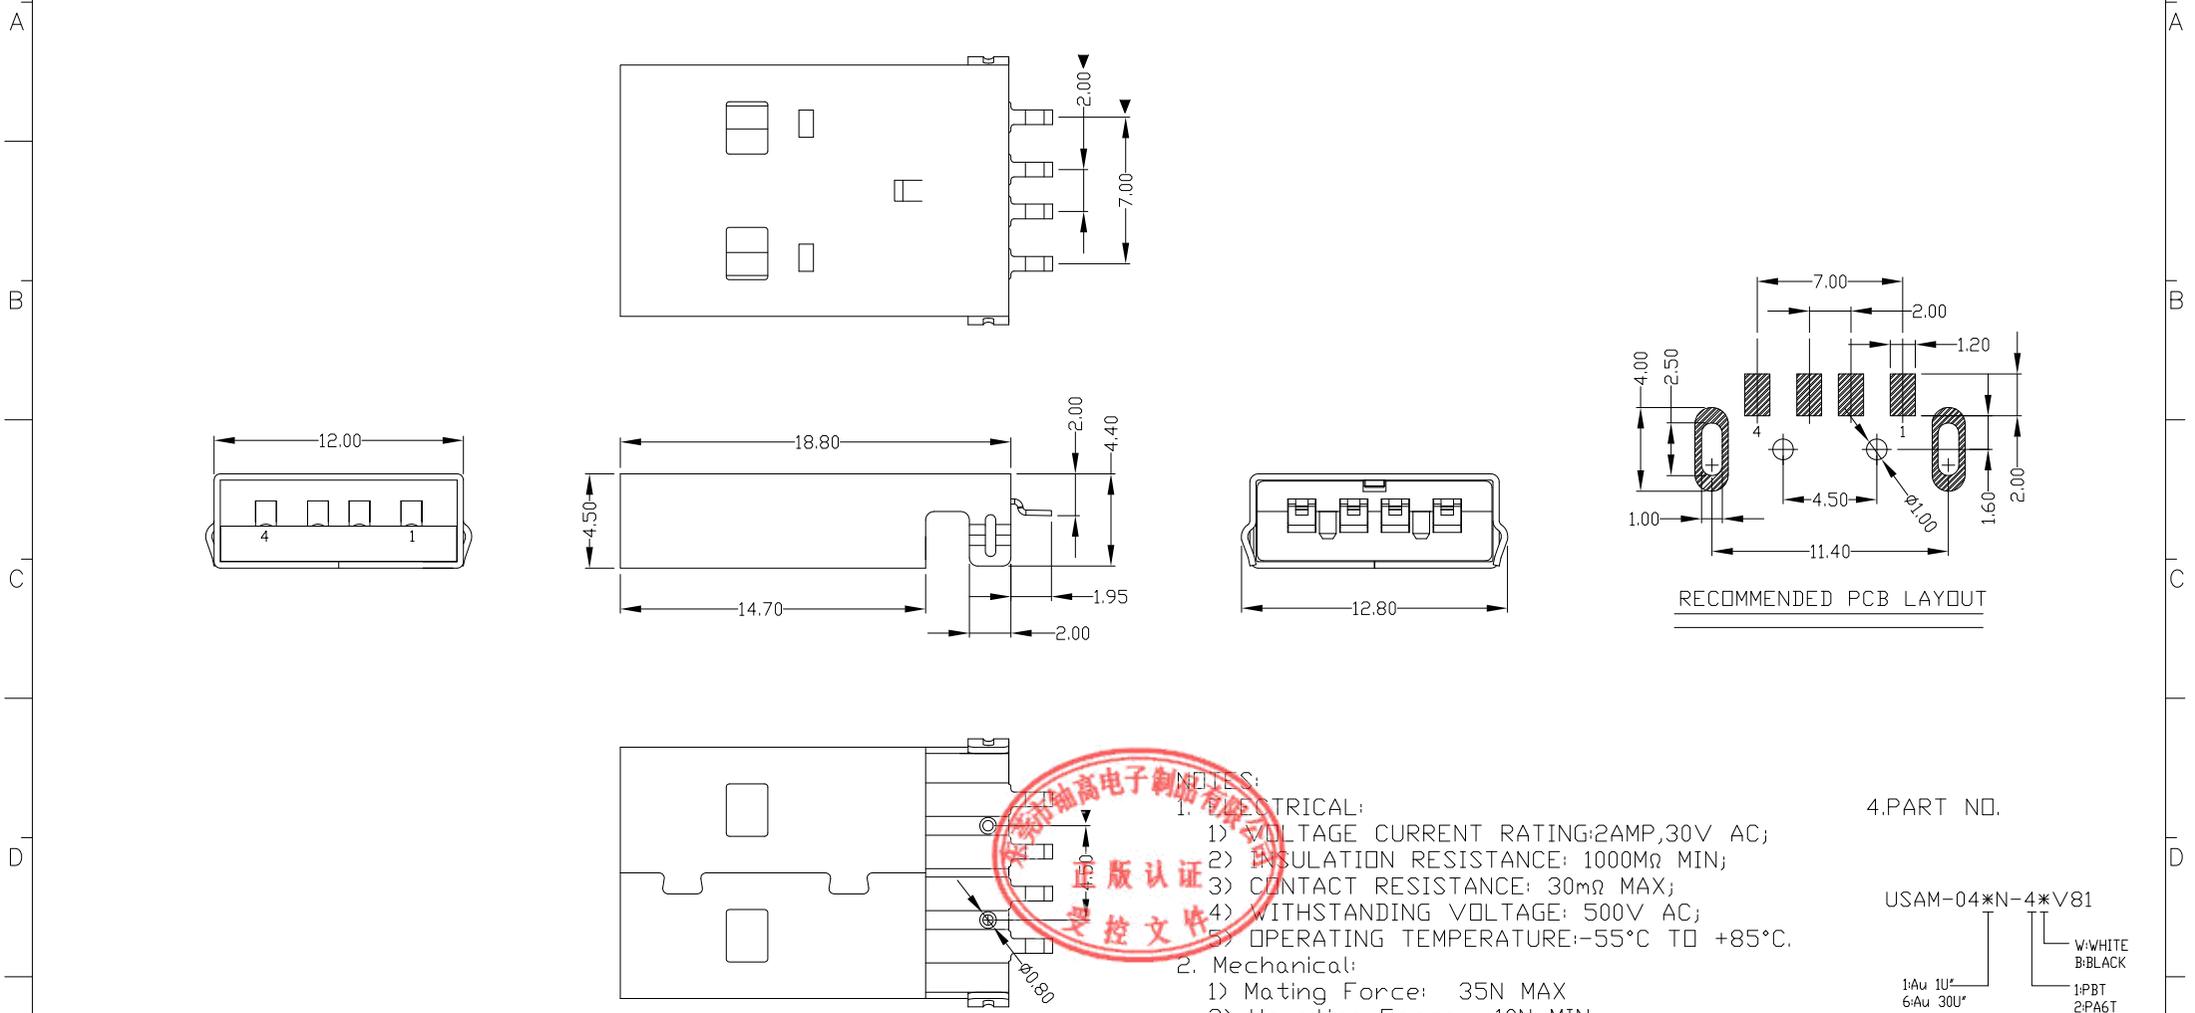

- NOTES:
1. ELECTRICAL:
 - 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
 - 1) Mating Force: 35N MAX
 - 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
 USAM-04*N-4*V81

1#Au 10"
 6#Au 30"

1#PBT
 2#PA6T
 3#PA9T
 4#LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	东莞市铀高电子制品有限公司						
3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.' ±2'	MAT'L	TITLE:		PART NO.:			
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1'		SEE NOTE	USB A/M 沉板式成品 (19.80)		USAM-04*N-4*V81		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH	DR: gan 2012/7/03		DWG NO.:			
							SEE NOTE	CHKD: gan 2012/7/03		AII-V81			
							Q'TY	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
										1:1	1/1	B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNDTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNDTECH INC.

