

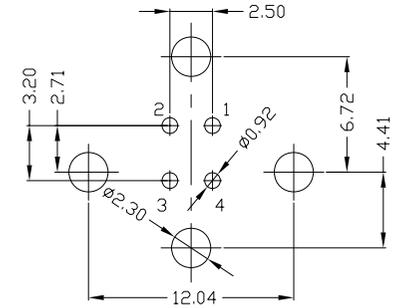
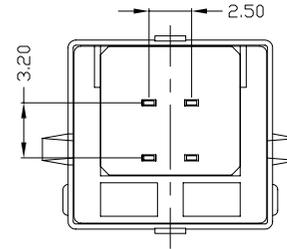


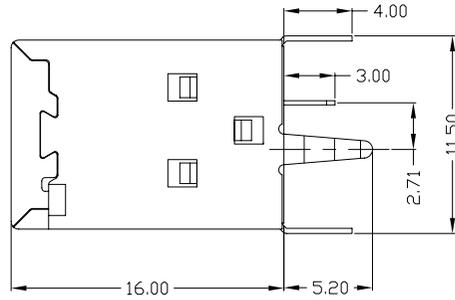


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

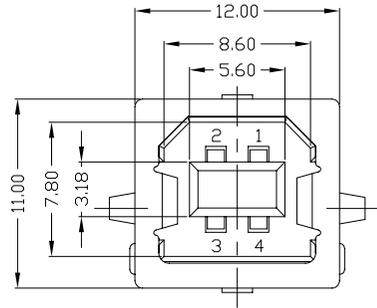


RECOMMENDED PCB LAYOUT

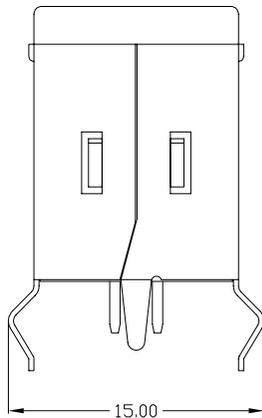

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55 $^{\circ}$ C TO +85 $^{\circ}$ C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

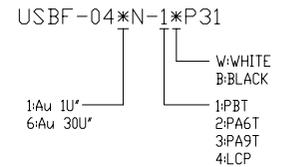

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ± 0.35	X.' $\pm 2'$	UNITS	mm
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ± 0.3	.X' $\pm 1'$	MAT'L	<p style="text-align: center;">东莞市铀高电子制品有限公司</p> <p>TITLE: USB BF 180度 插板式(4脚) PART NO.: USBF-04*N-1*P31</p> <p>DR: gan 2014/09/16 DWG NO.: AII-P31</p> <p>CHKD: gan 2014/09/16</p> <p>APPD:</p> <p>SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING</p>
2	SHELL	COPPER ALLOY/SPCC	1	PLATED NICKEL	.XX ± 0.25	.XX'	SEE NOTE	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ± 0.15	.XXX'	FINISH	
							SEE NOTE	
							Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.

