

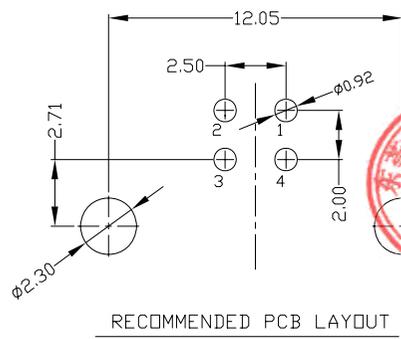
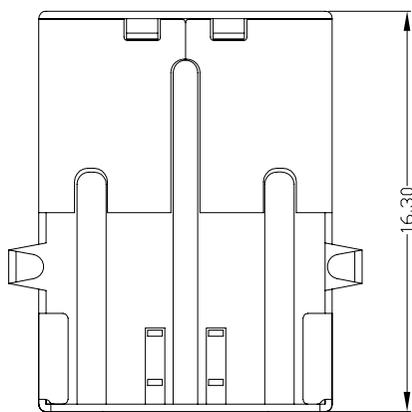
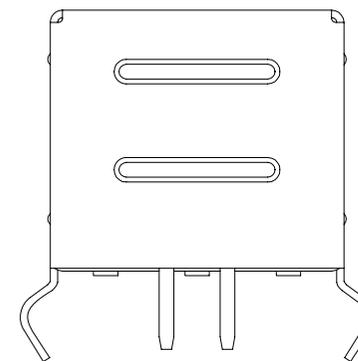


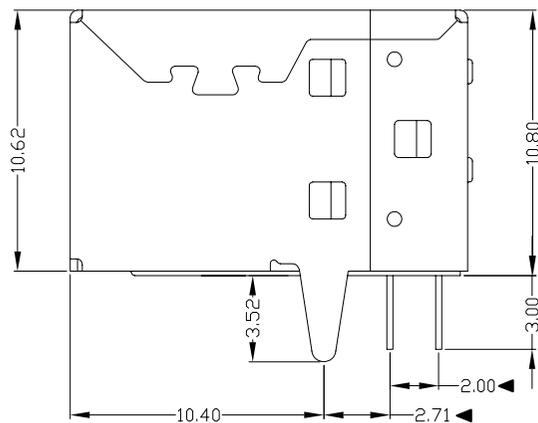

RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

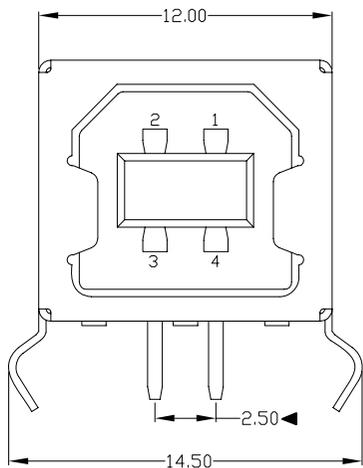

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- PART NO.



USBF-04\*N-1\*R85

1: Au 1U\*  
6: Au 30U\*

W: WHITE  
B: BLACK

1: PBT  
2: PA6T  
3: PA9T  
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm	东莞市铀高电子制品有限公司				
4	BACK COVER	SPCC	1	PLATED NICKEL	.X ±0.3	.X.* ±1*	MAT'L		TITLE: USB B/F 90° DIP (弯脚) PART NO.: USBF-04*N-1*R85 DR: gan 2012/7/04 DWG NO.: AII-R85 CHKD: gan 2012/7/04 APPD:				
3	HOUSING	PBT	1	UL94V-0	.XX ±0.25	.XX*	SEE NOTE						
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX*	FINISH						
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN			SEE NOTE						
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY		SCALE	SHEET	REV.	CUSTOMER DRAWING
									1:1	1/1	B		