








RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

USB TYPE-C 6P  
RECEPTACLE INTERFACE PIN ASSIGNMENTS

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

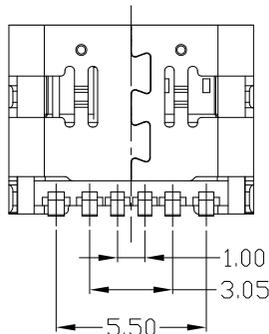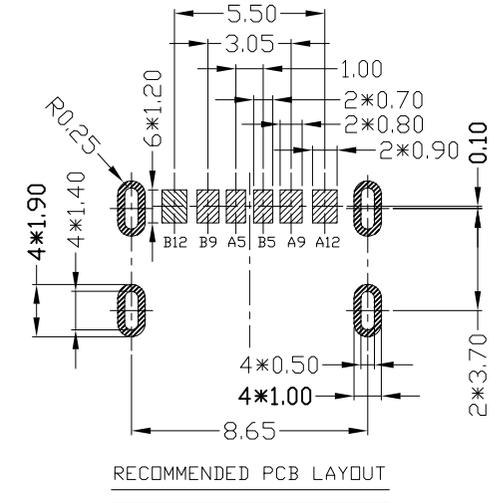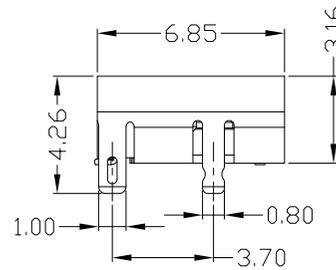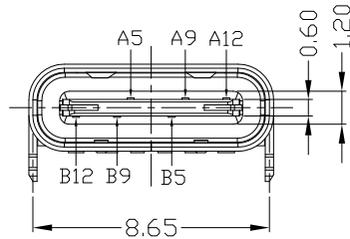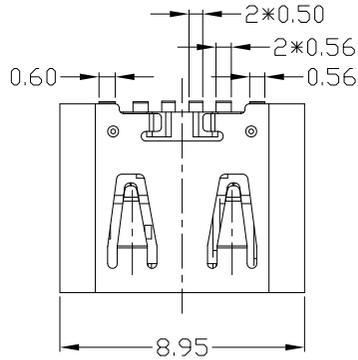

NOTES:

- ELECTRICAL:
  - CURRENT RATING: 5AMP MIN FOR VBUS; VOLTAGE RATING: 20VAC MAX; 0.25A FOR GND PIN, 0.25A MIN FOR OTHER.
  - INSULATION RESISTANCE: 100MΩMIN;
  - CONTACT RESISTANCE: 40mΩMAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE: -25°C TO +85°C.
- Mechanical:
  - INSERTION Force: 5~20N.
  - EXTRACTION Force: 8~20N.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USCF-061N-4BVG30

1: Au 1U\*  
2: Au 3U\*  
5: Au 15U\*  
6: Au 30U\*  
W: WHITE  
B: BLACK  
1: PBT  
2: PA6T  
3: PA9T  
4: LCP

Bill of materials:

					X. ±0.35	X.' ±2'	UNITS	东莞市铀高电子制品有限公司							
					.X ±0.3	.X' ±1'	mm								
4	SHRAPNEL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.25	.XX'	MAT'L	SEE NOTE	TITLE:	PART NO.:					
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XXX ±0.15	.XXX'	FINISH	SEE NOTE	USB TYPE CF 卧式SMT 6P L6.85mm	USCF-061N-4BVG30					
2	TERMINAL	COPPER ALLOY	6	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.			Q'TY	DR:	gan 2018/10/25		DWG NO.:	AII-VG30		
1	HOUSING	LCP+30%GF	1	UL94V-0					CHKD:	gan 2018/10/25		SCALE	SHEET	REV.	CUSTOMER
NO	PARTS	MATERIAL	QTY	FINISHING					APPD:			1:1	1/1	B	DRAWING