

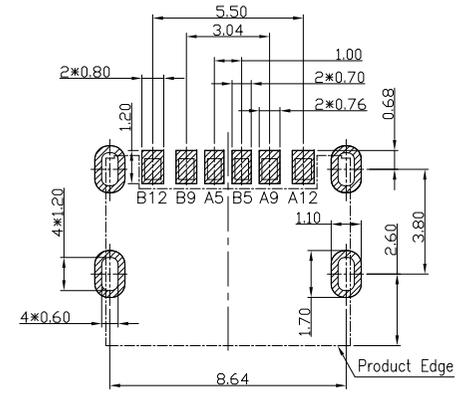
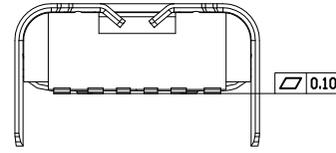
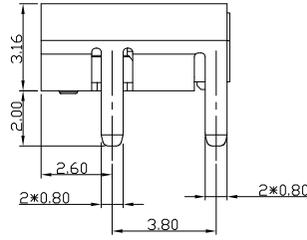
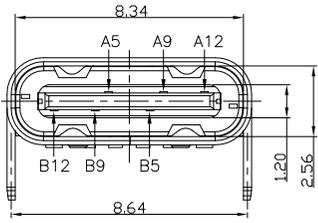


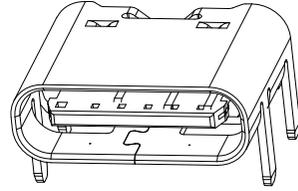


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

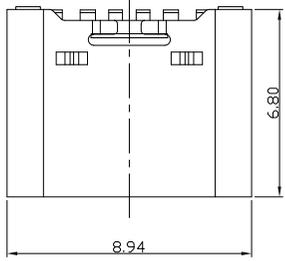

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

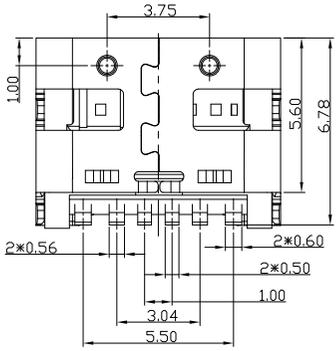

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 5AMP MAX;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -30°C TO +85°C.
 - Mechanical:
 - Mating Force: 5N~20N
 - Unmating Force: 8N~20N
 - Durability: 10,000 cycles
 - DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC

4.PART NO.
USCF-06*N-4BVS206

1:Au 1U*
2:Au 3U*
5:Au 15u*
6:Au 30U*

1:PA6T
2:PA6T
3:PA9T
4:LCP

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5				X. ±0.35	X.* ±2*	UNITS	mm	东莞市铀高电子制品有限公司 TITLE: USB C F TYPE 单排SMT 6PIN L=6.5 四脚插板 PART NO.: USCF-06XN-4BVS206 DR: Ricky 2017/11/17 DWG NO.: AII-VS206 CHKD: Ricky 2017/11/17 APPD:
4				.X ±0.30	.X* ±1*	MAT'L		
3	SHELL	STAINLESS STEEL	1	.XX ±0.20	.XX* ±0.5*	SEE NOTE		
2	CONTACT	COPPER ALLOY	6	.XXX ±0.10	.XXX*	SEE NOTE		
1	HOUSING	LCP+30%GF	1			Q'TY		
NO	PARTS	MATERIAL	QTY	FINISHING				SCALE SHEET REV. CUSTOMER DRAWING 1:1 1/1 B

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC

