

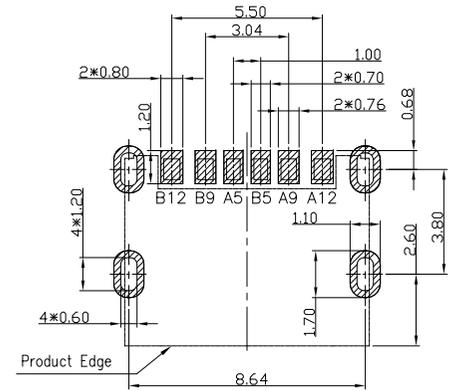
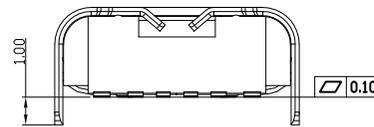
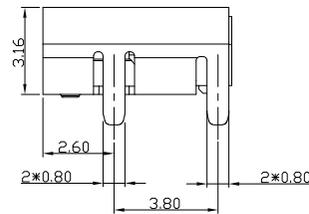
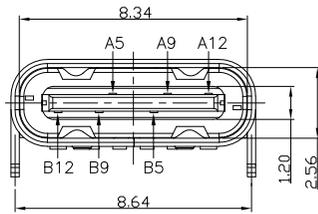


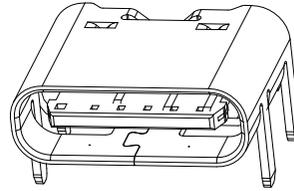


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

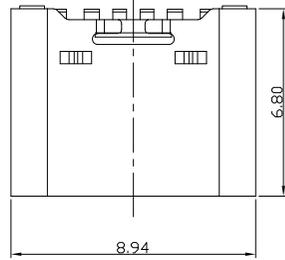

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

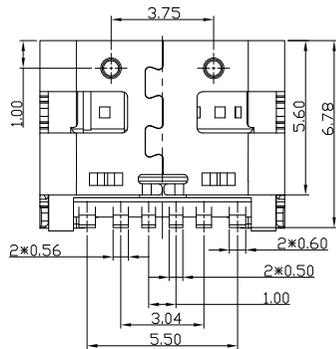

- NOTES:
- ELECTRICAL:
 - CURRENT RATING: 5AMP MAX;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -30°C TO +85°C.
 - Mechanical:
 - Mating Force: 5N~20N
 - Unmating Force: 8N~20N
 - Durability: 10,000 cycles
 - DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USCF-06*N-4BVS207

1:Au 1U*
2:Au 3U*
5:Au 15u*
6:Au 30U*

W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5					X. ±0.35	X.' ±2'	UNITS	mm	东莞市铀高电子制品有限公司				
4					.X ±0.30	.X' ±1'	MAT'L						
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.20	.XX' ±0.5'	SEE NOTE	TITLE:		PART NO.:			
2	CONTACT	COPPER ALLOY	6	PLATED GOLD/NICKEL	.XXX ±0.10	.XXX'	FINISH	USB C F TYPE 单排SMT 6PIN L=6.5四脚插板 脚长1.0		USCF-06XN-4BVS207			
1	HOUSING	LCP+30%GF	1	UL94V-0			SEE NOTE	DR: <i>Ricky</i> 2018/02/13		DWG NO.:			
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC			Q'TY	AII-VS207	SCALE	SHEET	REV.	CUSTOMER DRAWING
								APPD: <i>Ricky</i> 2018/02/13	1:1	1/1	B		