

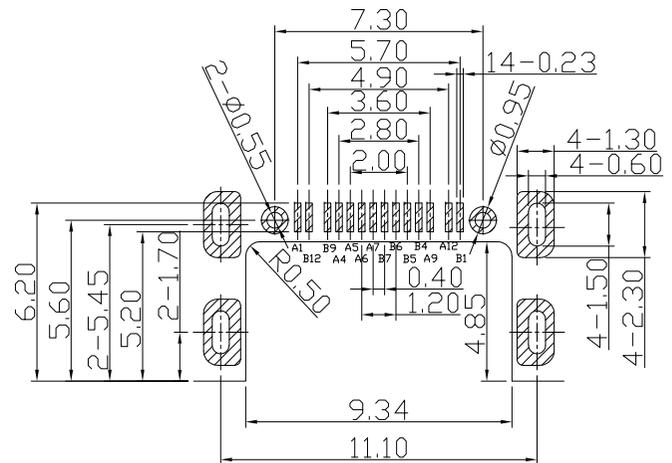
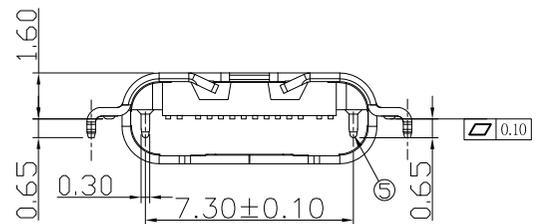
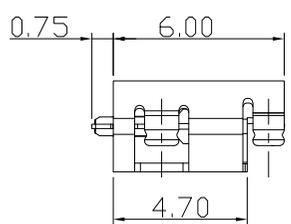
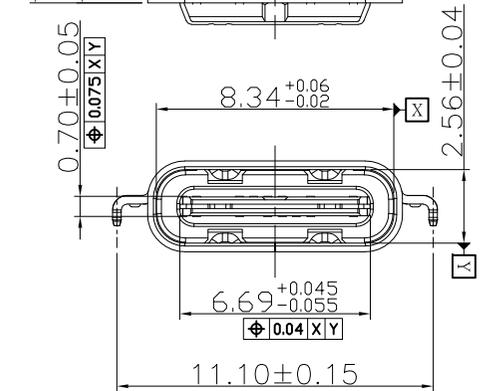
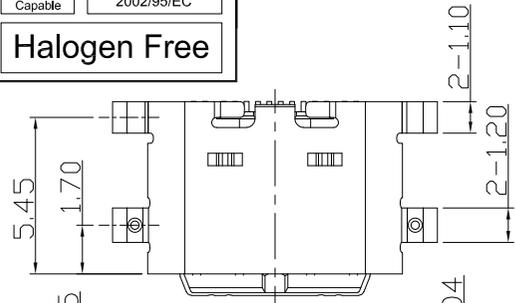
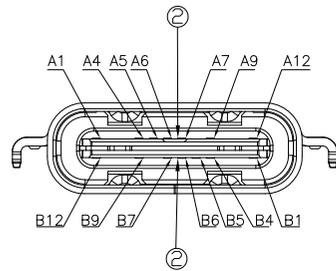



**RoHS Compliant**  
 2002/95/EC  
**Halogen Free**

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

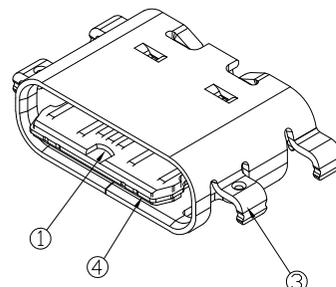

RECOMMENDED PCB LAYOUT

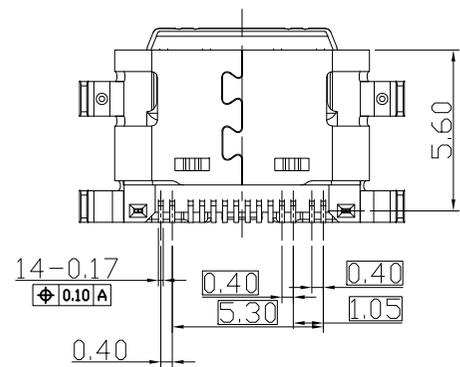

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

1. ELECTRICAL:  
 1) CURRENT RATING: 3AMP MAX;  
 2) INSULATION RESISTANCE: 100MΩ MIN 250V DC;  
 3) CONTACT RESISTANCE: INITIAL 40mΩ MAX; AFTER 50mΩ MAX;  
 4) WITHSTANDING VOLTAGE: 100V AC MIN;  
 5) OPERATING TEMPERATURE: -40°C TO +80°C.  
 2. Mechanical:  
 1) Mating Force: 5N~20N MAX.  
 2) Unmating Force: 8N~20N(INITIAL) 6N~20N(AFTER 10000 CYCLES) MIN.  
 3) Durability: 200±50 CYCLES/HOUR, 10000 CYCLES.;  
 3. DIMENSIONS MARKED "▼"  
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
 USCF-14\*N-4BVJ42  
 1/AU 1U\*  
 2/AU 3U\*  
 3/AU 15U\*  
 6/AU 30U\*  
 1/PBT  
 2/PA6T  
 3/PA9T  
 4/LCP  
 W/WHITE  
 B/BLACK

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
4	MID PLATE	STAINLESS STEEL	1	PLATED GOLD	X. ±0.38	X.' ±5'	UNITS	mm
3	SHELL	STAINLESS STEEL	1	PLATED GOLD/NICKEL	.X ±0.30	.X' ±3'	MAT'L	SEE NOTE
2	TERMINAL	COPPER ALLOY	14	PLATED GOLD	.XX ±0.20	.XX' ±1'	FINISH	SEE NOTE
1	INSULATOR	LCP+30%GF	1	UL94V-0	.XXX ±0.10	.XXX'	Q'TY	SEE NOTE
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

**东莞市铀高电子制品有限公司**

TITLE: USB TYPE CF 2.0 单排14PIN 沉板式 板上1.60mm 短体  
 PART NO.: USCF-14XN-4BVJ42  
 DR: Ricky 2018/1/25  
 DWG NO.: AII-VJ42  
 CHKD: Ricky 2018/1/25  
 APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	