

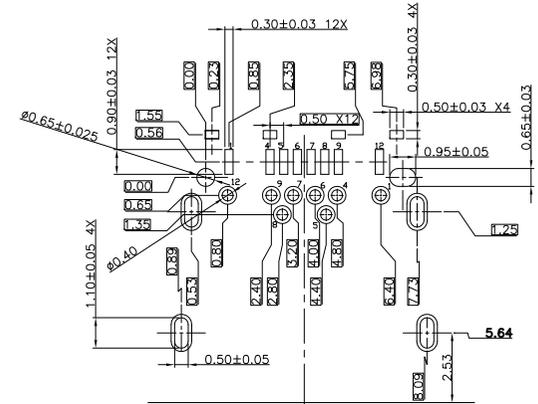
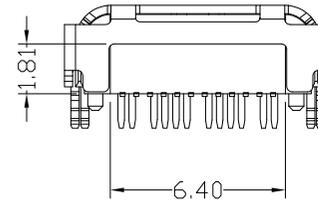
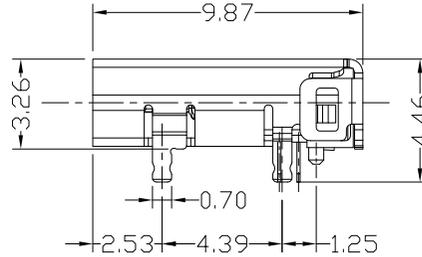
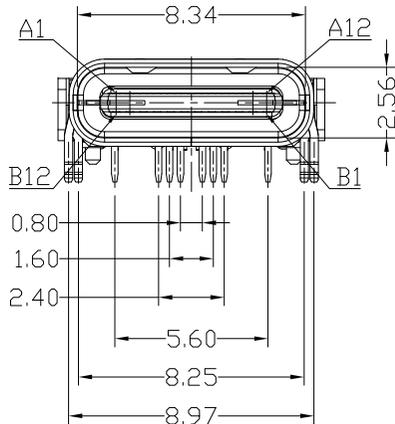


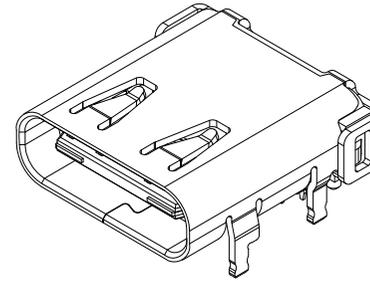


RoHS
Compliant
2002/95/EC
Process
Capable

REV.	ECN.	NO.	APPD.

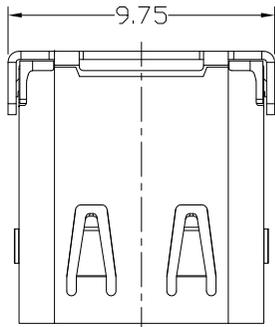

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

CONNECTOR
FRONT EDGE

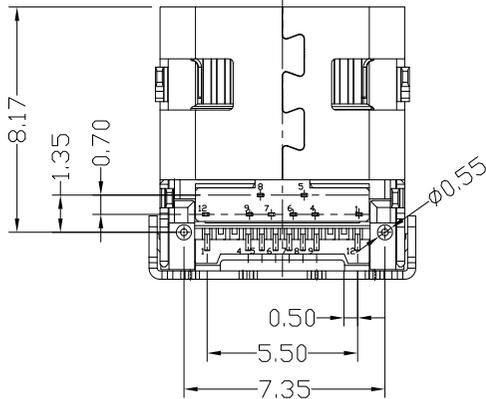

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



- NOTES:
1. ELECTRICAL:
1) CURRENT RATING: 3AMP MAX;
2) INSULATION RESISTANCE: 100MΩ MIN 250V DC;
3) CONTACT RESISTANCE: 30mΩ MAX;
4) WITHSTANDING VOLTAGE: 250V AC;
5) OPERATING TEMPERATURE: -30°C TO +80°C.
2. Mechanical:
1) Mating Force: 35N MAX.
2) Unmating Force: 10N MIN.
3. DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USCF-16*N-4BL61
W: WHITE
B: BLACK
BL: BLUE
1: Au 1U*
2: Au 3U*
5: Au 15u*
6: Au 30U*
1: PBT
2: PA6T
3: PA9T
4: LCP

5	SHRAPNEL	STAINLESS STEEL	2	.X ±0.30	.X' ±1*	UNITS	mm
4	HOOK	STAINLESS STEEL	1	.XX ±0.20	.XX'	MAT'L	
3	SHELL	STAINLESS STEEL	1	.XXX ±0.10	.XXX'	SEE NOTE	
2	TERMINAL	COPPER ALLOY	16			FINISH	
1	HOUSING	LCP+30%GF	1			SEE NOTE	
NO	PARTS	MATERIAL	QTY	FINISHING		Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC

东莞市铤高电子制品有限公司

TITLE: USB TYPE CF 前插后贴16P 板上型 后盖有缺口

PART NO.: USCF-16XN-4BLV61

DR: Ricky 2017/12/12

DWG NO.: AII-V61

CHKD: Ricky 2017/12/12

APPD:

SCALE: 1:1

SHEET: 1/1

REV.: B

CUSTOMER DRAWING