

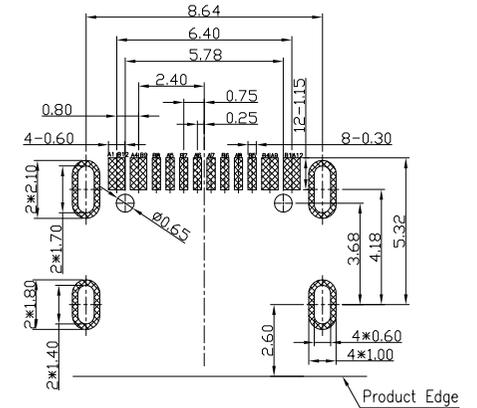
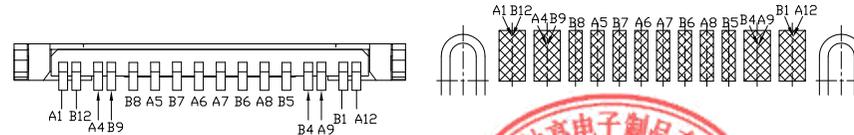
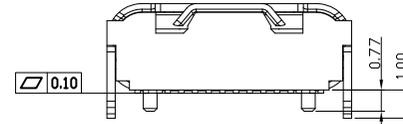

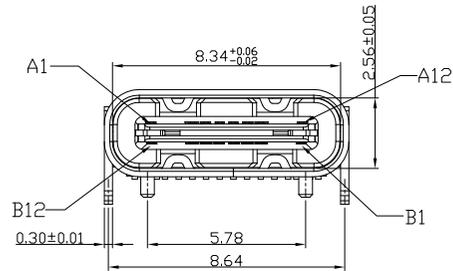


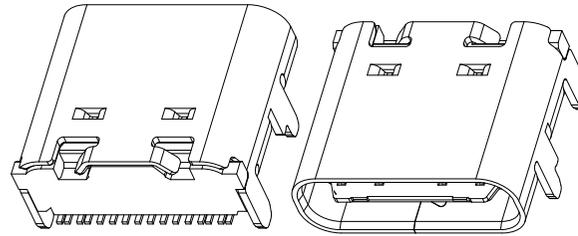


RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.



RECOMMENDED P.C.B. LAYOUT(T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

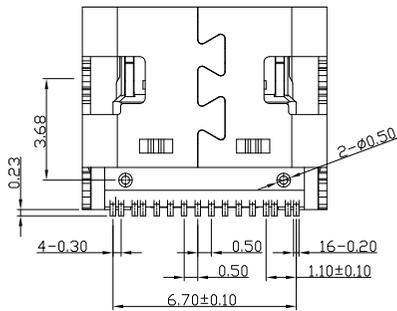

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DNE
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTE:
1.ELECTRICAL:
1)CURRENT RATING: 3AMP MAX;
2)INSULATION RESISTANCE: 100MΩ MIN;
MEASURED BY 500 VDC.
3)CONTACT RESISTANCE: 30mΩ MAX;
4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
5)OPERATING TEMPERATURE:-30°C TO +85°C.
2.Mechanical:
1)Mating Force: 5N~20N
2)Unmating Force: 8N~20N
3)Durability: 10,000 cycles
3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
USCF-16*N-4BVD03
W:WHITE
B:BLACK
1:Au 1U*
2:Au 3U*
5:Au 15U*
6:Au 30U*
1:PBT
2:PA6T
3:PA9T
4:LCP

5	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.50	X.* ±2*	UNITS	<p style="text-align: center;">东莞市铀高电子制品有限公司</p>
4	SHIELDING PLATE	STAINLESS STEEL	1		.X ±0.20	.X' ±1'	MAT'L	
3	MD	LCP+30%GF	1	UL94V-0	.XX ±0.10		SEE NOTE	
2	CONTACT	COPPER ALLOY	16	PLATED GOLD/NICKEL			FINISH	
1	HOUSING	LCP+30%GF	1	UL94V-0			SEE NOTE	
NO	PARTS	MATERIAL	QTY	FINISHING			Q'TY	DR: <i>Ricky</i> 2019/08/22

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

TITLE: USB TYPE CF 单排贴板16PIN L=7.35 四脚插板有柱		PART NO.: USCF-16XN-4BVD03	
DR: <i>Ricky</i> 2019/08/22		DWG NO.: AII-VD03	
CHKD: <i>Ricky</i> 2019/08/22		SCALE	SHEET
APPD:	1:1	1/1	REV. B
			CUSTOMER DRAWING