

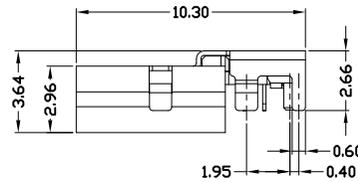
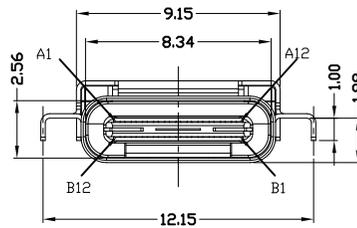
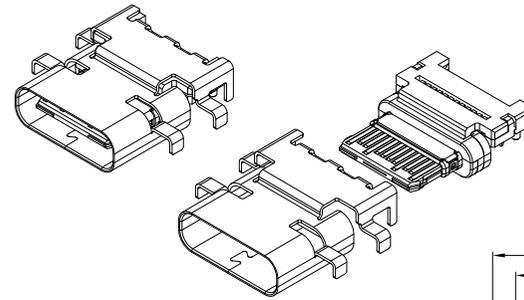




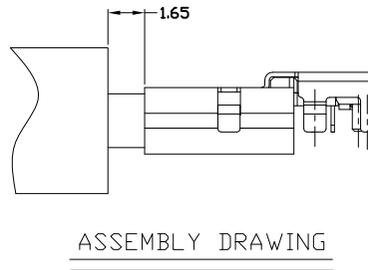


RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

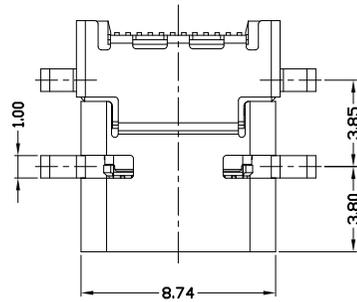

PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

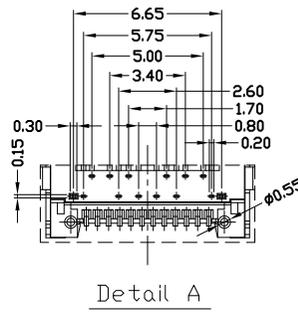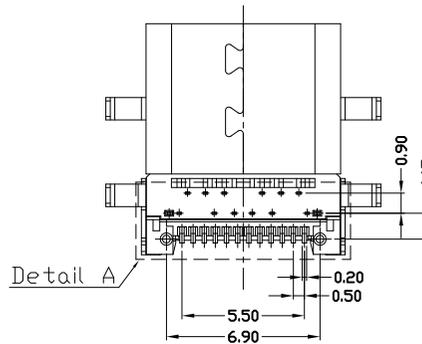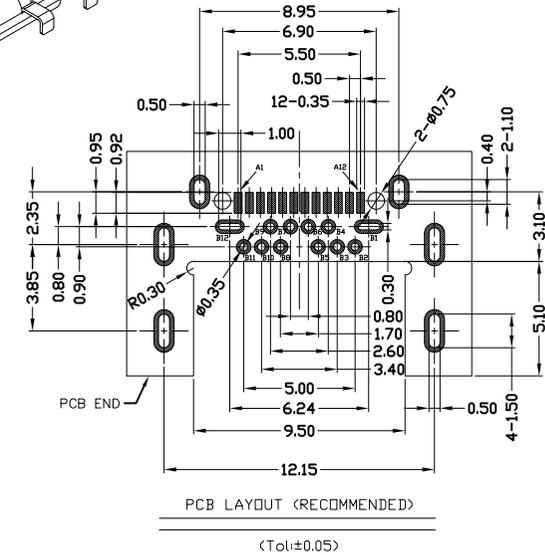

NOTES

- ELECTRICAL:
  - CURRENT RATING:1.5AMP;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 40mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE:-30°C TO +80°C.
- Mechanical:
  - Mating Force: 5~20N MAX.
  - Unmating Force: 8~20N MIN.
  - Durability: 10000 cycles MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USCF-241N-4BVH01

W:WHITE  
B:BLACK

1PAU 1U\*  
2PAU 3U\*  
5PAU 15U\*  
6PAU 30U\*

1PBT  
2PA6T  
3PA9T  
4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.' ±2'	UNITS	mm
5	SHRAPNEL	STAINLESS STEEL	1	PLATED NICKEL	.X ±0.3	.X' ±1'	MAT'L	
4	HOOK	STAINLESS STEEL	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE	
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL/TIN	.XXX ±0.15	.XXX'	FINISH	
2	TERMINAL	COPPER ALLOY	24	PLATED GOLD/TIN			SEE NOTE	
1	HOUSING	SYNTHETIC RESIN LCP+30%GF	1	UL94V-0			Q'TY	

东莞市铀高电子制品有限公司

TITLE:	USB C F TYPE L=10.3 沉板 前插后贴	PART NO.:	USCF-241N-4BVH01
DR:	gan 2018/06/23	DWG NO.:	AII-VH01
CHKD:	gan 2018/06/23	SCALE	1:1
APPD:		SHEET	1/1
		REV.	B
		CUSTOMER DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOVTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOVTECH INC.

