

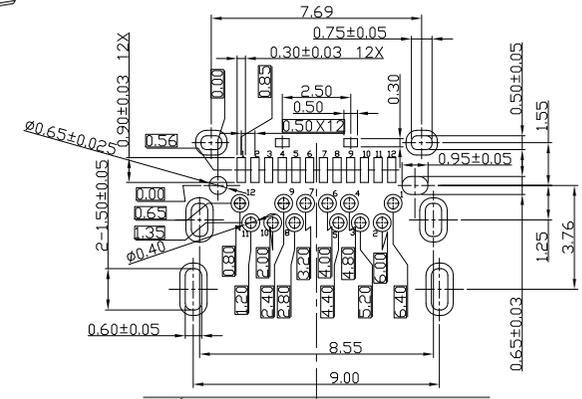
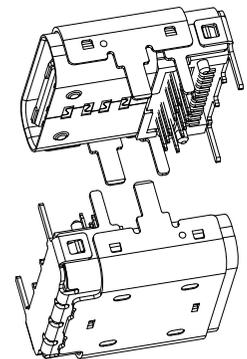
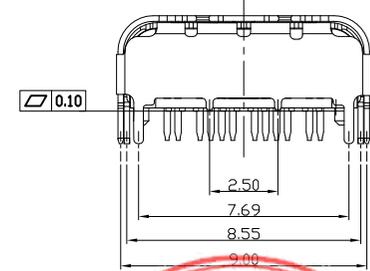
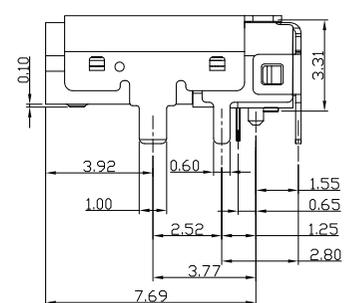
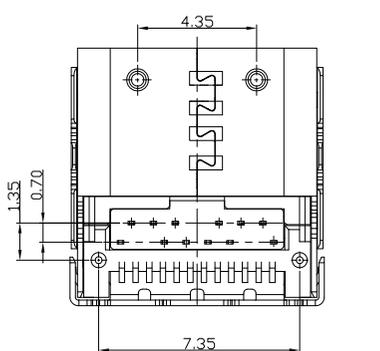


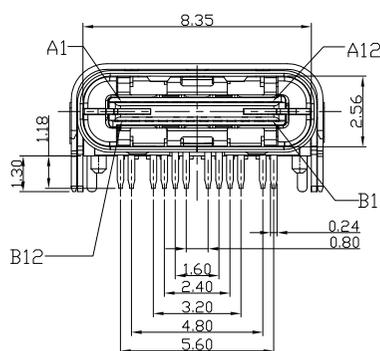

RoHS Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

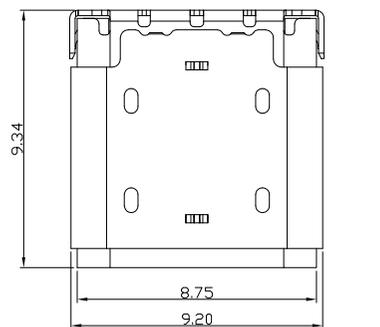

CONNECTOR FRONT EDGE  
RECOMMENDED P.C.B. LAYOUT (T:1.00mm)  
TOLERANCE UNSPECIFIED ±0.05mm

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- ELECTRICAL:
- CURRENT RATING: 3AMP MAX;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 40mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE: -30°C TO +85°C.
2. Mechanical:
- Mating Force: 5N~20N
  - Unmating Force: 8N~20N
  - Durability: 10,000 cycles
3. DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
USCF-24\*N-4BVS28  
W: WHITE  
B: BLACK  
1PA6T  
2PA6T  
3PA9T  
4LCP  
1Au 1U\*  
2Au 3U\*  
5Au 15U\*  
6Au 30U\*

6	TOP SHELL	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.35	X.' ±2'	UNITS	mm
5	SHELL	STAINLESS STEEL	1	PLATED NICKEL	.X ±0.30	.X' ±1'	MAT'L	
4	SPRING	STAINLESS STEEL	1		.XX ±0.20	.XX' ±0.5'	SEE NOTE	TITLE: USB C F TYPE 前插后贴带上盖
3	SHIELDING PLATE	STAINLESS STEEL	1	PLATED NICKEL	.XXX ±0.10	.XXX'	FINISH	PART NO.: USCF-24XN-4BVS28
2	CONTACT	COPPER ALLOY	24	PLATED GOLD/NICKEL			SEE NOTE	DR: Ricky 2017/11/13
1	HOUSING	LCP+30%GF	1	UL94V-0			Q'TY	CHKD: Ricky 2017/11/13
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC



SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	