

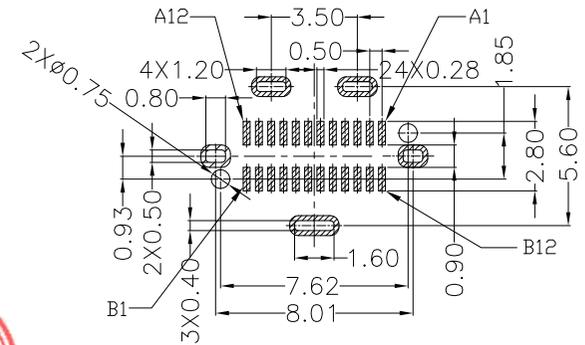
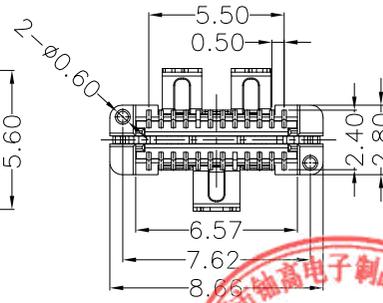
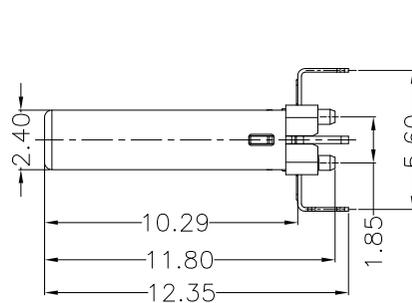



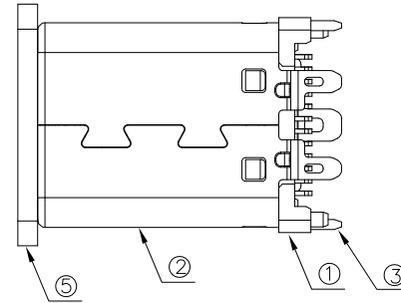


RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |

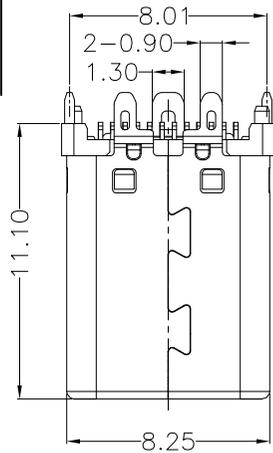

RECOMMENDED PCB LAYOUT (t=0.80±0.05)
COMPONENT SIDE (GENERAL TOLERANCE: ±0.05)

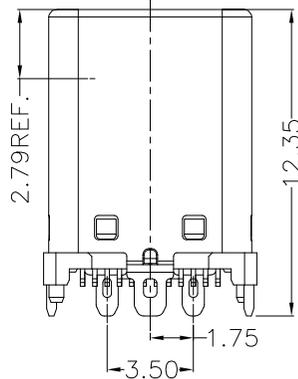

| | | | |
|-----|-------------|-----|-------------|
| A1 | GND | B12 | GND |
| A2 | SSTXP1 | B11 | SSRXP1 |
| A3 | SSTXN1 | B10 | SSRXN1 |
| A4 | VBUS | B9 | VBUS |
| A5 | CC1 | B8 | SBU2 |
| A6 | DP1 | B7 | DN2 |
| A7 | DN1 | B6 | DP2 |
| A8 | SBU1 | B5 | CC2 |
| A9 | VBUS | B4 | VBUS |
| A10 | SSRXN2 | B3 | SSTXN2 |
| A11 | SSRXP2 | B2 | SSTXP2 |
| A12 | GND | B1 | GND |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |



NOTES:

- ELECTRICAL:
 - CURRENT RATING: 3AMP MAX;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -30°C TO +85°C.
- Mechanical:
 - Mating Force: 5N~20N
 - Unmating Force: 8N~20N
 - Durability: 10,000 cycles
- DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USCM-24*N-4BQS20
W:WHITE
B:BLACK
1:Au 1U*
2:Au 3U*
5:Au 15U*
6:Au 30U*
1:PBT
2:PA6T
3:PA9T
4:LCP

| | | | | | | |
|----|---------|-----------------|-----|--------------------|------------|------------|
| 6 | CONTACT | COPPER ALLOY | 24 | PLATED GOLD/NICKEL | X. ±0.35 | X.' ±2* |
| 5 | COVER | LCP+30%GF | 1 | UL94V-0 | .X ±0.30 | .X' ±1* |
| 4 | SPRING | STAINLESS STEEL | 2 | | .XX ±0.20 | .XX' ±0.5* |
| 3 | LATCH | STAINLESS STEEL | 1 | PLATED TIN/NICKEL | .XXX ±0.10 | .XXX* |
| 2 | SHELL | STAINLESS STEEL | 1 | PLATED NICKEL | | |
| 1 | HOUSING | LCP+30%GF | 2 | UL94V-0 | | |
| NO | PARTS | MATERIAL | QTY | FINISHING | | |

| | | | | | | |
|--|--|--|--|--|----------|----|
| | | | | | UNITS | mm |
| | | | | | MAT'L | |
| | | | | | SEE NOTE | |
| | | | | | FINISH | |
| | | | | | SEE NOTE | |
| | | | | | Q'TY | |

| | | | |
|---|--|-------------------------------|----------|
| 东莞市铱高电子制品有限公司 | | | |
| TITLE: USB C M TYPE 直立式外壳3支脚 脚距1.75 H=11.10mm L=12.35mm | | PART NO.: USCM-24XN-4BQS20 | |
| DR: Ricky 2017/11/16 | | DWG NO.: AII-QS20 | |
| CHKD: Ricky 2017/11/16 | | SCALE | SHEET |
| APPD: | | 1:1 | 1/1 |
| | | REV. | CUSTOMER |
| | | B | DRAWING |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC

