






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

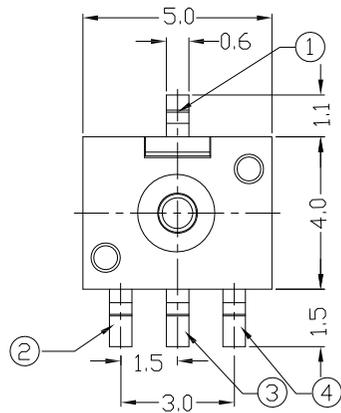

CIRCUIT DIAGRAM

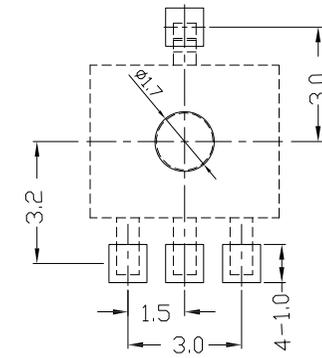

P.C.B. LAYOUT

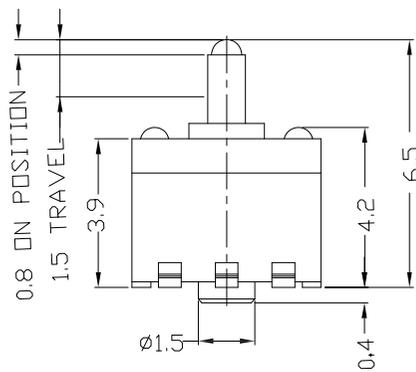

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 30V 0.1A
Contact Resistance	1Ω Max.
Travel	1.5±0.2mm
Operating Force	80±30gf
Operating Life(cycles)	50,000



7					
6					
5	CONTACT SPING	SUS	1	Ag PLATED	
4	TERMINAL	BRASS	4	Ag PLATED	
3	CASE	PA6T	1	BLACK	
2	COVER	PA6T	1	BLACK	
1	KNOB	PA6T	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

GENERAL TOLERANCE UNITS mm
 WITHIN 1.5mm±0.1mm MAT'L
 OVER 1.5mm±0.2mm SEE NOTE
 FINISH SEE NOTE
 Q'TY
 THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

东莞市铀高电子制品有限公司			
TITLE:	DETECTOR SWITCH	PART NO.:	YD-1140
DR:	Ricky 2020/05/11	DWG NO.:	AZJ-1140
CHKD:	Ricky 2020/05/11	SCALE	6:1
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	