




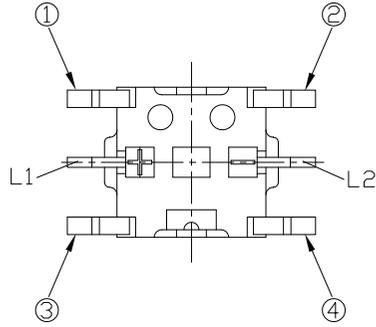

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS



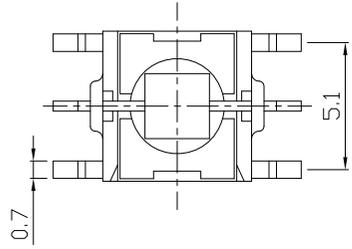


CIRCUIT DIAGRAM

MODEL CODE

ATI-007-MW16-1MN**-BS
1 2 3 4 5 6 7 8 9

- Series Number
- Terminal Type: M=SMT
- Stem Color: W=White B=Black
- Operating Force: 16=160gf 25=250gf
- Circuit
- LED Type: M=SMT
- LED Brightness: N=Normal S=Super Bright H=Super High Bright
- LED Color: 01=Red 02=Yellow 03=Green 04=Blue 05=White 06=Pure Green 08=Amber 09=Blue Green 0A=Pink 0B=Purple
- Packing Type: BS=Blister Packing TR=Tape Reel Packing

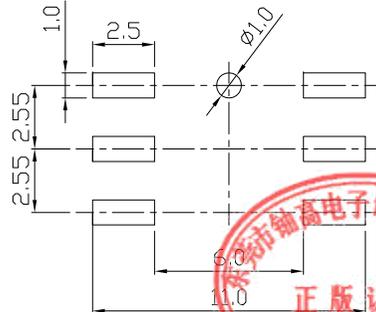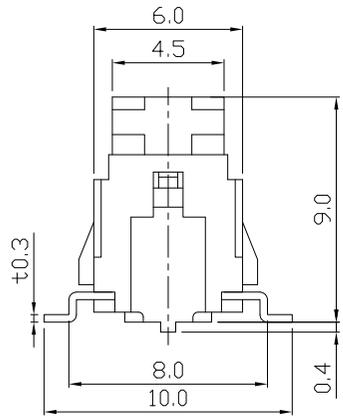

P.C.B LAYOUT
TOP VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC 12V 50mA
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	0.25±0.1mm
OPERATING FORCE	160±50gf 250±50gf
OPERATING LIFE(cycles)	100,000

8							
7							
6							
5	LED		1				
4	CONTACT	PBS C5210R-EH	1	Ag CLAD			
3	TERMINAL	BRASS STRIP	4	Ag PLATED			
2	CASE	NYLON+F.G	1	BLACK			
1	KNOB	NYLON+F.G	1	NATURAL/BLACK			
NO.	PARTS	MATERIAL	Q'TY	FINISHING			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

WITHIN 1.5mm: ±0.1mm	UNITS mm	东莞市铀高电子制品有限公司				
OVER 1.5mm: ±0.2mm	MAT'L					
SEE NOTE	FINISH	TITLE: ILLUMINATED TACT SWITCH	PART NO.: YTI-007-M			
SEE NOTE	Q'TY	DR: Ricky 2016/10/06	DWG NO.: AZJ-007-M			
		CHKD: Ricky 2016/10/06	SCALE 4:1	SHEET 1/1	REV. A	CUSTOMER DRAWING