






RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.




### DIMENSIONS

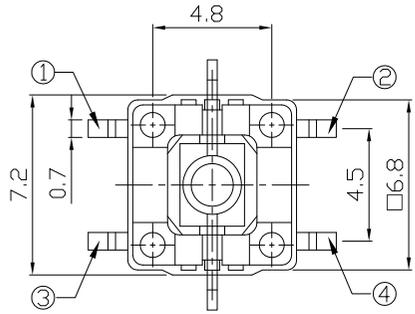

### MODEL CODE

ATI-005-MW16-1MN\*\*-BS  
1 2 3 4 5 6 7 8 9

1. Series Number
2. Terminal Type: M=SMT
3. Stem Color: W=White B=Black
4. Operating Force: 16=160gf 25=250gf
5. Circuit
6. LED Type: M=SMT
7. LED Brightness: N=Normal S=Super Bright H=Super High Bright
8. LED Color: 01=Red 02=Yellow 03=Green 04=Blue 05=White 06=Pure Green 08=Amber 09=Blue Green 0A=Pink 0B=Purple
9. Packing Type: BS=Blister Packing TR=Tape Reel Packing

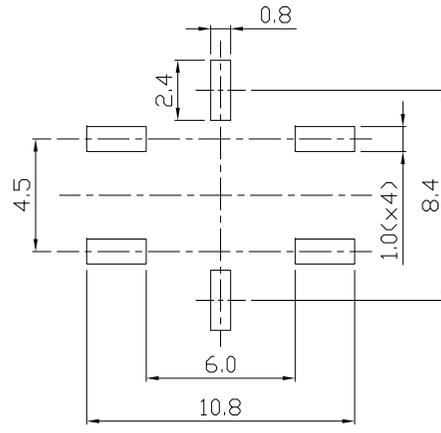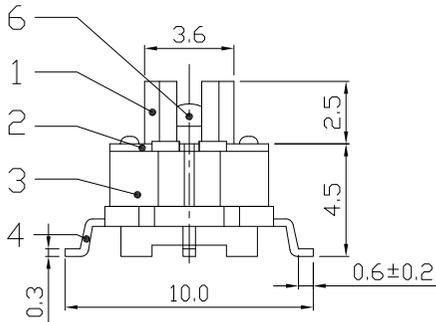

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC 12V 50mA
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	0.25±0.1mm
OPERATING FORCE	160±50gf 250±50gf
OPERATING LIFE(cycles)	100,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.
7					OVER 1.5mm: ±0.2mm	MAT'L	
6	LED		1			SEE NOTE	TITLE: ILLUMINATED TACT SWITCH
5	CONTACT	PBS C5210R-EH	1	Ag CLAD			PART NO.: ATI-005-M
4	TERMINAL	BRASS STRIP	4	Ag PLATED			
3	CASE	NYLON+F.G	1	BLACK			DR: <i>Ricky</i> 2016/10/05
2	COVER	NYLON+F.G	1	NATURAL			DWG NO.: AZJ-005-M
1	KNOB	NYLON+F.G	1	WHITE/BLACK			CHKD: <i>Ricky</i> 2016/10/05
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



Q'TY	DR:	CHKD:	APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
				4:1	1/1	A	