






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.




DIMENSIONS

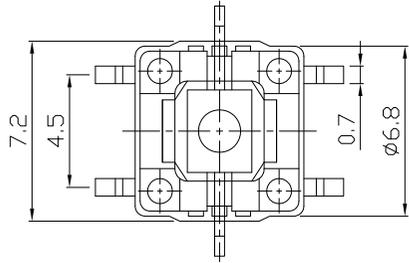

MODEL CODE

ATI-004-MW16-1MN**-BS
1 234 5678 9

- Series Number
- Terminal Type: M=SMT
- Stem Color: W=White B=Black
- Operating Force: 16=160gf 25=250gf
- Circuit
- LED Type: M=SMT
- LED Brightness: N=Normal S=Super Bright H=Super High Bright
- LED Color: 01=Red 02=Yellow 03=Green 04=Blue 05=White 06=Pure Green 08=Amber 09=Blue Green 0A=Pink 0B=Purple
- Packing Type: BS=Blister Packing TR=Tape Reel Packing

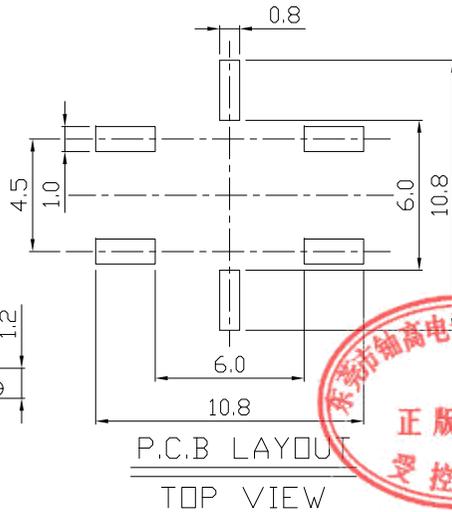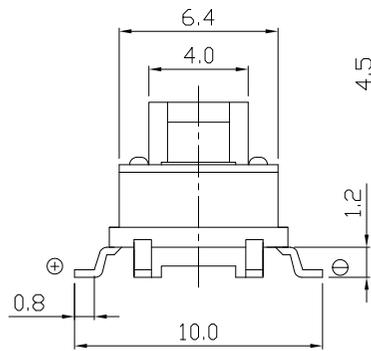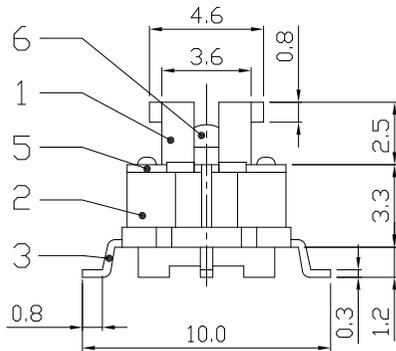

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC 12V 50mA
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	0.25±0.1mm
OPERATING FORCE	160±50gf 250±50gf
OPERATING LIFE(cycles)	100,000



8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	东莞市铀高电子制品有限公司
7					OVER 1.5mm: ±0.2mm	MAT'L		
6	LED		1			SEE NOTE		TITLE: ILLUMINATED TACT SWITCH
5	COVER	PET	1	NATURAL				PART NO.: YTI-004-M
4	CONTACT	PBS C5210R-EH	1	Ag CLAD				DR: Ricky 2016/10/05
3	TERMINAL	BRASS STRIP	4	Ag PLATED				DWG NO.: AZJ-004-M
2	CASE	NYLON+F.G	1	BLACK				CHKD: Ricky 2016/10/05
1	KNOB	NYLON+F.G	1	NATURAL/BLACK				APPD:
NO.	PARTS	MATERIAL	Q'TY	FINISHING				SCALE SHEET REV. CUSTOMER DRAWING
								4:1 1/1 A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

