


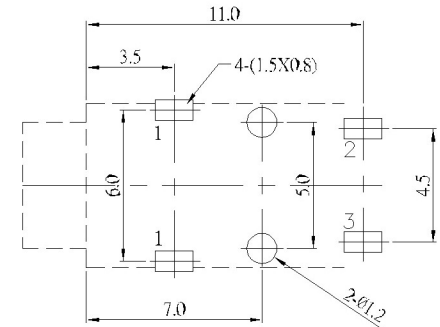
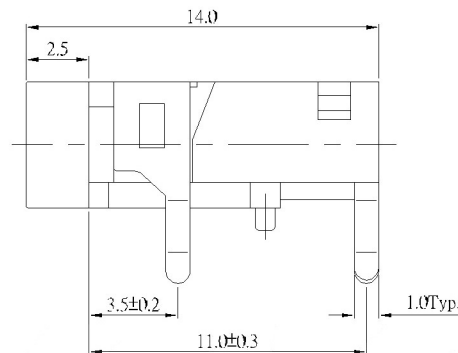


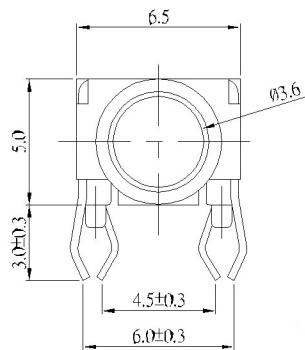

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

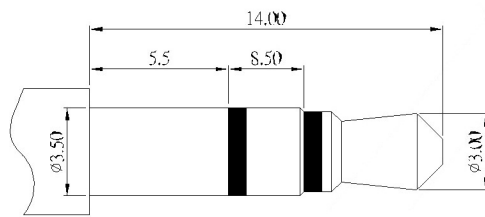

Ø3.50mm 3 POLE PLUG

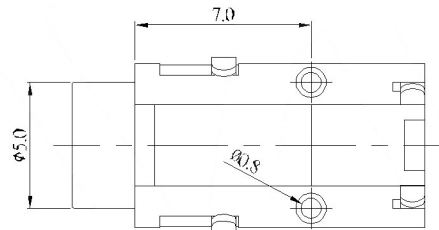


SPECIFICATION

- Rating : DC 30V 0.5A ;
- Contact resistance : $\leq 30m\Omega$;
- Insulation resistance : $\geq 100M\Omega$;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles °

MODEL NO.	PJ-3733
SCHEMATIC	

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Pbt	

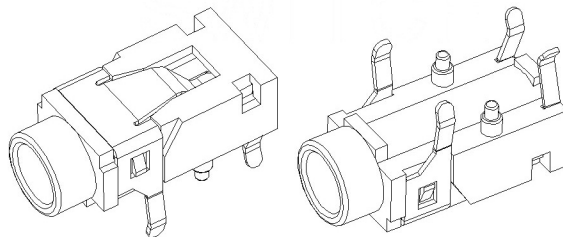

DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	PJ-3733
REVISIONS					WEIGHT 1.0g
UNSPECIFIED TOLERANCES					SHEET 1/1
					REVISION A0

东莞市铱高电子制品有限公司