




Circuit Diagram ☐: Terminal No.

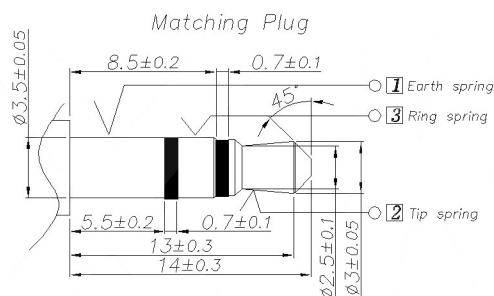

CODE	PLATING
_B	Bushing & Nut (Ni Plated) Terminal (Ag Plated)
_D	Bushing & Nut (Ni Plated) Terminal (Au Plated)
_F	Bushing & Nut (Au Plated) Terminal (Au Plated)

Specification:

1. Rating : DC 30V 0.5A.
2. Contact resistance: $\leq 30m\Omega$.
After test: $\leq 50m\Omega$.
3. Insulation resistance: $\geq 100M\Omega$ (500VDC).
After test: $\geq 50M\Omega$.
4. Withstanding voltage: 500VAC.
5. Insertion and extraction force: 3N~30N.
6. life test: 5000cycles min.
7. Operation temperature range: $-20^{\circ}C \sim 70^{\circ}C$.
8. Preservative temperature range: $-40^{\circ}C \sim 85^{\circ}C$.
9. Sign "▲" is importance dimension.



	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Pbt	

						ANGULAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE:		
						X.X	±0.2mm	DWN		DATE		VIEW: 	3.5 PHONE JACK		
						X.XX	±0.1mm	CHKD		DATE		UNIT: mm	PART NO.:		
						X.XXX	±0.05mm	APPD		DATE		SIZE: A4	DWG NO.:		
						东莞市铰高电子制品有限公司							PJ-392W-X		
													WEIGHT	SHEET	REVISION
													1.0g	1/1	A0
REVISIONS						UNSPECIFIED TOLERANCES									
△ X															
△ X															
△ X															
MARK	DESCRIPTION				DATE	REVISED	APPROVED								