

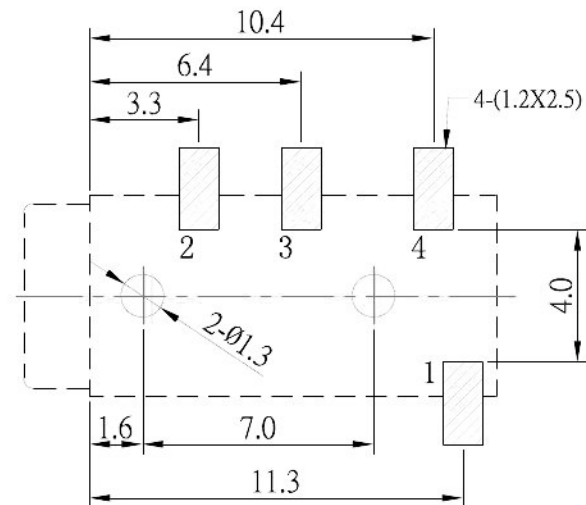
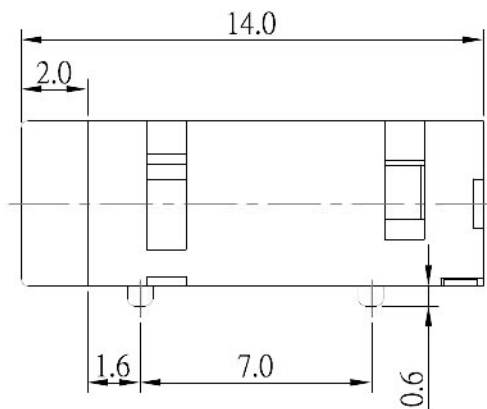
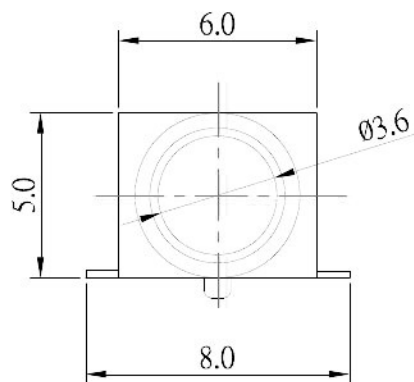


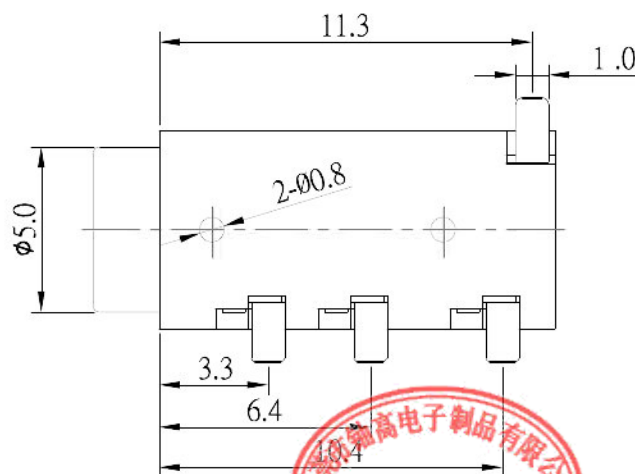


P.C.B LAYOUT
TOP VIEW

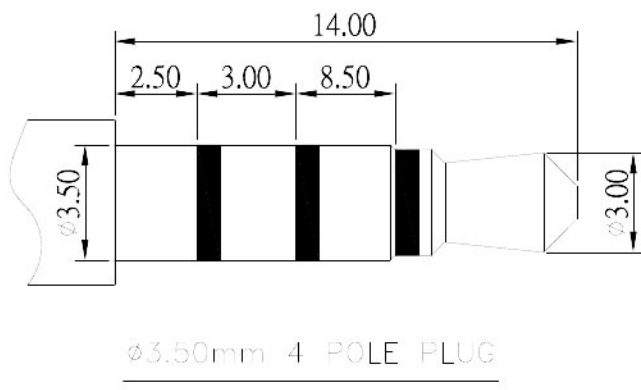

SCHEMATIC

PJ-320D-X



SPECIFICATIONS

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test : 5,000 cycles °

R:red	G:green
Y:yellow	B:black
W:white	T:transparent

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	HOUSING	1	PPA	
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	3.5 SMT PHONE JACK
CHKD	DATE	UNIT: mm	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
东莞市铯高电子制品有限公司			PJ-320D-X-SMT
WEIGHT	SHEET	REVISION	
1.0g	1/1	A0	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δ X					units: mm
Δ X					tolerance:
Δ X					X.X ±0.2mm
					X.XX ±0.1mm
					X.XXX ±0.05mm

