
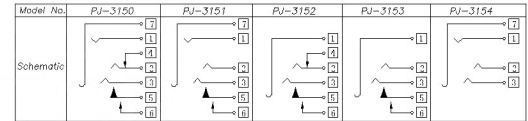


Specification:
 1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 30m\Omega$;
 After life test: $\leq 50m\Omega$
 3. Insulation resistance: $\geq 100M\Omega$ (500VDC);
 After life test: $\geq 50M\Omega$
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3N -25N;
 6. life test: 5000cycles min;
 7. Operation temperature range: 20 °C-70°C
 8. Preservative temperature range: -10 °C-85°C
 9. Sign ▲ "is importance dimension



	MATERIAL	PLATING
terminal 1	copper all oy	silver
terminal 2	copper all oy	silver
terminal 3	copper all oy	silver
terminal 4	copper all oy	silver
plastic	PA9T	

DSND	DATE	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm	DWG NO.: PJ-315X
APPD	DATE	SIZE: A4	WEIGHT SHEET REVISION 1.0g 1/1 A0

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGLAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

东莞市铀高电子制品有限公司