


**SCHEMATIC**



- SPECIFICATION**
1. Rating : DC 30V 0.5A;
  2. Contact resistance:  $\leq 50m\Omega$ ;
  3. Insulation resistance:  $> 100M\Omega$  (DC250V);
  4. Withstand voltage: 500VAC ;
  5. Insertion and extraction force: 3-25N;
  6. life test: 5,000 cycles.

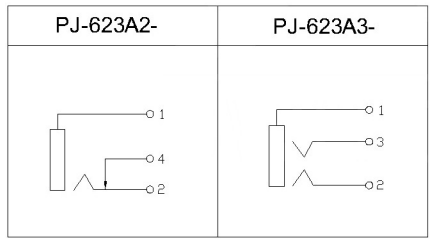

	MATERIAL	PLATING
terminal 1	copper alloy	silver
terminal 2	copper alloy	silver
terminal 3	copper alloy	silver
terminal 4	copper alloy	silver
plastic	PBT	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
$\Delta X$					ANGULAR $\pm 5^\circ$
$\Delta X$					$L \leq 4$ $\pm 0.2$
$\Delta X$					$4 < L \leq 16$ $\pm 0.3$
					$16 < L \leq 63$ $\pm 0.4$
					$L > 63$ $\pm 0.5$

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW: $\oplus$	<b>6.5 PHONE JACK</b>
CHKD	DATE	UNIT: mm	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.:
			<b>PJ-623AX-X</b>
		WEIGHT	SHEET
		1.0g	1/1
		REVISION	A0

**东莞市铀高电子制品有限公司**