

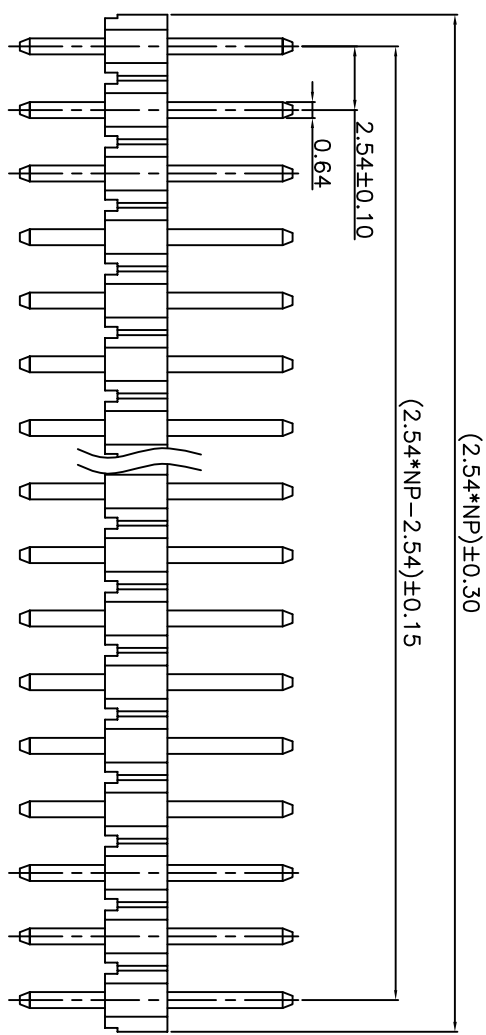


版本	变更	说明	日期	签名
A	NEW		12.07.09	Zeng_qc

Specifications

1. Current Rating: 2Amps
2. Insulation Resistance: 5000 MΩ min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max.
5. Operating Temperature: -40°C to +105°C
6. Contact Material: Copper Clad Steel
7. Insulation Material: Asfolllows
8. Plated: Asfolllows


Ordering Information

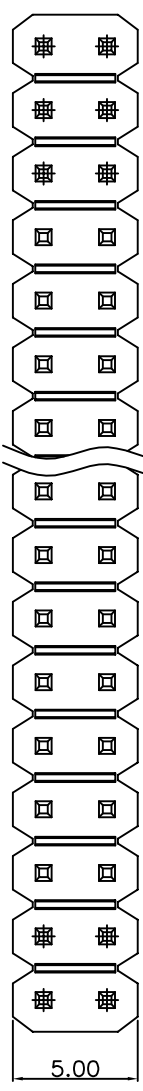


(2.54\*NP-2.54)±0.10

(2.54\*NP)±0.15

(2.54\*NP)±0.30

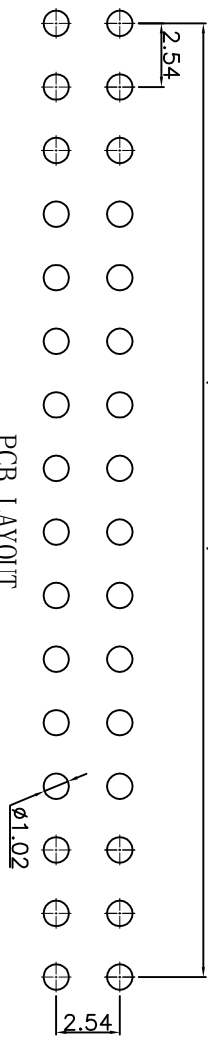

PCB LAYOUT



东莞市铷高电子有限公司

公差标准	公差尺寸	角度	度
±0.25	0.°	±3°	
±0.20	0.°	±2°	
±0.10	0.00°	±1°	

品名	规格	制	图	日期
排针PH2.54 双排 24NP	180度 系列			12.07.09
料号	文件编号	审核	核准	
比例	1:1	单位	mm	页码
				1/2
				尺碼
				A4