
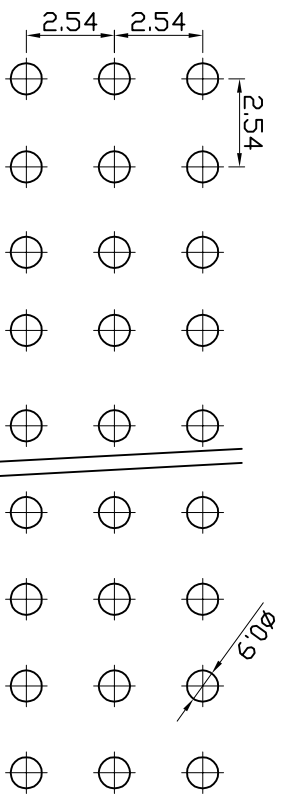
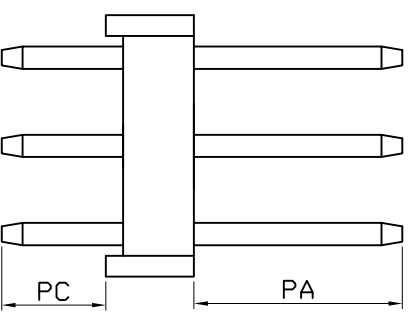
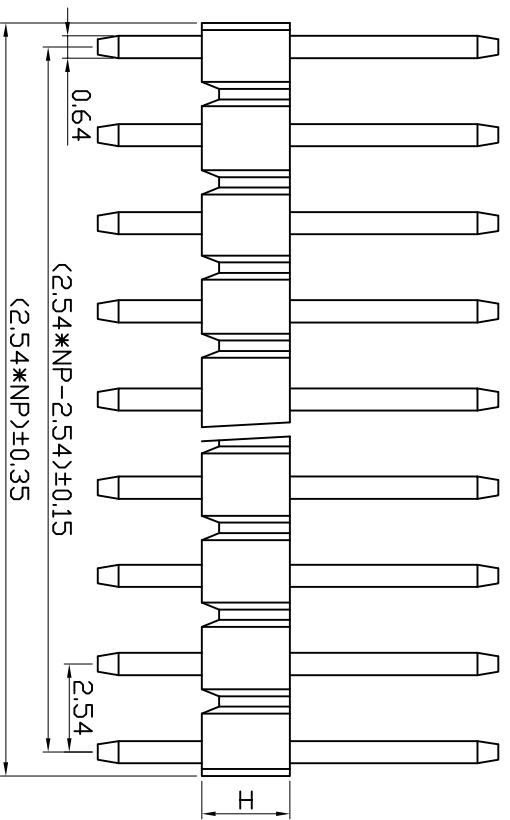


版本 REV	编号 ECON NO.	位置 LOCATIONS	变更内容 DESCR IPTION	日期 DATE	变更人 DESIGN
-----------	----------------	-----------------	----------------------	------------	---------------

Specifications

1. Current Rating: 1Amps
2. Insulation Resistance: 1000 MΩ min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max.
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulation Material: Asfollows
8. Plated: Asfollows

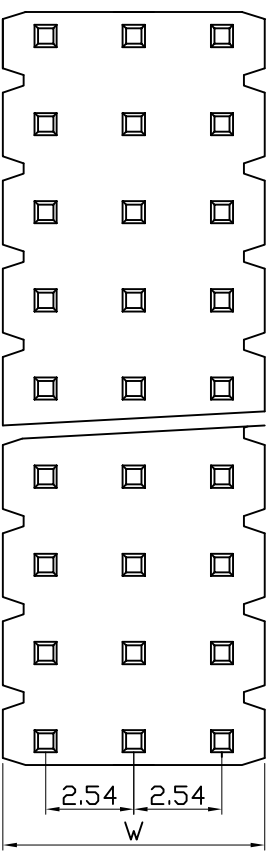

Ordering Information



东莞市铷高电子有限公司

TOLERANCE UNLESS OTHERWISE SPECIFIED		品名 TITLE:		P02.54#H 180° 3#NP三排排针		规格 (D):		日期 (Date):		09.12.29	
LITERALS		ANGLE		料号 (P/N):		审核 (CHKD):		日期 (Date):			
.0 ±0.3		0° ±2.0°		型号 (M/N):		核准 (APPD):		日期 (Date):			
.00 ±0.2		.0° ±1.0°		比例 (SCALE):		张数 (SHEET):		XOFX		SIZE: A4	
.000 ±0.1		.00° ±0.5°		单位 (UNITED):		mm		类别 (TYPE):			