
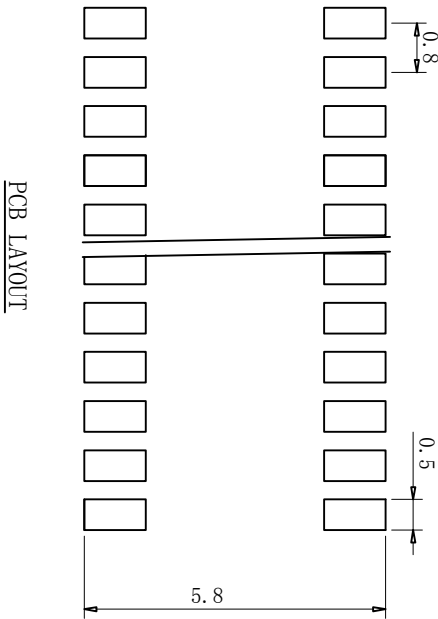


版本 REV	编号 ECN NO.	位置 LOCATIONS	变更内容 DESCRIPTION	日期 DATE	变更人 DESIGN
A0					

Specifications

1. Current Rating: 1amps
2. Insulator Resistance: 5000 Megohms min.
3. Dielectric withstanding Voltage: AC 500V
4. Operating Temperature: -40°C to +105°C
5. Contact Material: phosphor Bronze
6. Insulator Material: Asfollows
7. Plated: Asfollows

Ordering Information

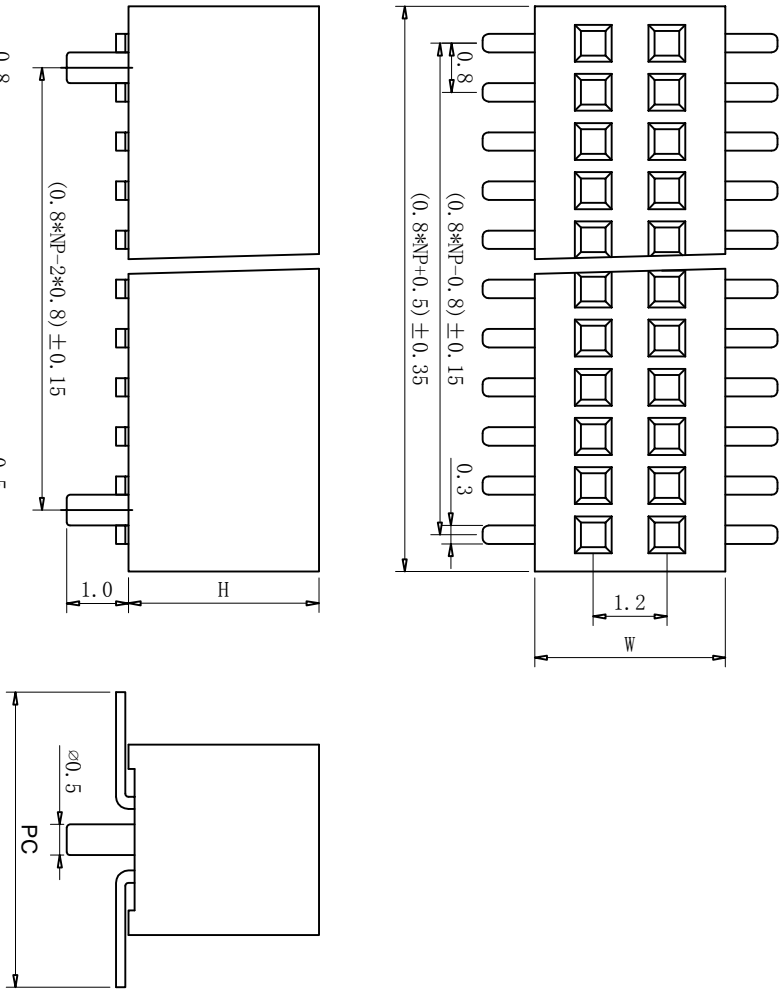

东莞市铷高电子制品有限公司

品名 TITLE:	PH0.8*H 8*NT双排插针U型排母	料号 (P/N):		日期 (Date):	09.08.19
TOLERANCE UNLESS OTHERWISE SPECIFIED		审核 (CHKD):		日期 (Date):	
LINER ANGLES		核准 (APPD):		日期 (Date):	
0 ± 0.3	0° ± 2.0°	比例 (SCALE):	1:1	单位 (UNITED):	mm
.00 ± 0.2	0° ± 1.0°	张数 (SHEET):	XOFX	尺寸 (SIZE):	A4
.000 ± 0.1	0° ± 0.5°	日期 (DATE):		类型 (TYPE):	